



# 2024

Product Matrix



IT ALL STARTS  
WITH A SWITCH...


# TABLE OF CONTENTS

<b>DO YOU NEED A SWITCH?</b>	
<b>QUESTIONS TO ASK</b>	<b>2-4</b>
<b>PRODUCT MATRIX</b>	
<b><u>2024 ADDENDUM: NPIS</u></b>	<b>5-6</b>
<b><u>ANTI-VANDAL SWITCHES</u></b>	<b>7-10</b>
<b><u>TERMINAL OPTIONS</u></b>	<b>11-12</b>
<b><u>PUSHBUTTON SWITCHES</u></b>	<b>13</b>
<b><u>SUBMINIATURE</u></b>	<b>14</b>
<b><u>PCB MOUNT</u></b>	<b>15-17</b>
<b><u>PANEL MOUNT</u></b>	<b>18-20</b>
<b><u>TACTILE SWITCHES</u></b>	<b>21-22</b>
<b><u>SNAP ACTION SWITCHES</u></b>	<b>29-30</b>
<b><u>ROCKER SWITCHES</u></b>	<b>31</b>
<b><u>SUBMINIATURE</u></b>	<b>32</b>
<b><u>RECTANGULAR PANEL MOUNT</u></b>	<b>33-34</b>
<b><u>oval / round panel mount</u></b>	<b>35-36</b>
<b><u>TOGGLE SWITCHES</u></b>	<b>37</b>
<b><u>MINIATURE</u></b>	<b>38</b>
<b><u>PANEL MOUNT</u></b>	<b>39</b>
<b><u>SLIDE SWITCHES</u></b>	<b>40-41</b>
<b><u>DIP SWITCHES</u></b>	<b>42-43</b>
<b>NOTES</b>	<b>44</b>
<b>SOLDERING PROFILES</b>	<b>45</b>

# DO YOU NEED A SWITCH?

E-Switch has prepared a seven-step process to help users determine which type of switch is best suited to meet their needs.

## 1. WHAT TYPE OF SWITCH ARE YOU LOOKING FOR?

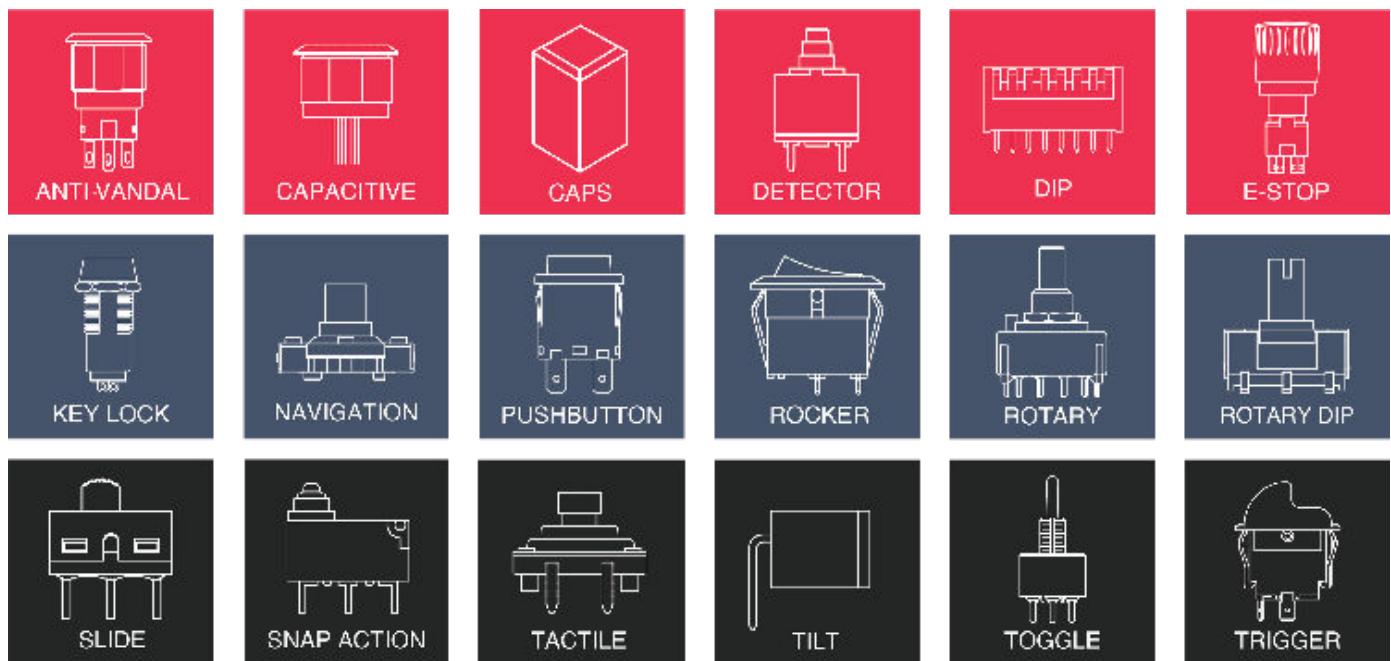

## 2. WHAT ELECTRICAL RATINGS ARE NEEDED?

1. Is the product AC or DC?
  - Common Voltages for AC: 125VAC, 250VAC
  - Common Voltages for DC: 3, 6, 12, 24 and 48VDC
2. How many amperes does the switch need to handle?
  - Low Power is in the millamps
  - Medium Power is from 2 amps to 5 amps
  - High Power is greater than 6 amps
3. If you're looking at medium to high power, what agency approvals are needed?
  - Where the product is sold determines what approvals are needed.



(cULus)  
North American Agency



(ENEC)  
European Agency



(VDE)  
German Agency







(TUV)  
Worldwide Agency

# DO YOU NEED A SWITCH?

## 3. HOW MANY POLES & THROWS DO YOU NEED?

Poles are the number of closed independent circuits.  
Throws are the number of positions in which a given pole is closed.

Common pole/throw configurations are:



Basic examples of above configurations are:

**SPST - Flashlight:** 1 pole for turning the light on or off.

**SPDT - Vacuum Cleaner:** 1 pole for power, 1 throw for low speed, 1 throw for high speed.

**DPST - Air Conditioner:** 1 pole controls the chiller, 1 pole controls the fan.




**DPDT - Hair Dryer:** 1 pole controls the heater, 1 pole controls the fan, 1 throw is for low speed, 1 throw is for high speed.

## 4. HOW DOES THE SWITCH ATTACH TO YOUR PRODUCT?

### 1. Panel Mount

- What is the panel cutout size?
- What is the thickness of the panel?
- What type of termination?
- Quick connect or solder lug




»



### 2. PCB Mount


- What type of termination?
- Through hole or surface mount
- What type of actuation?
- Right angle or vertical

• Do you need a process sealed component?



## 5. WHAT IS YOUR APPLICATION?

Knowing the application that the switch goes into aids us in the ability to look for unique instances where certain switches work better than others. Below are some examples of industries we sell our switches to.

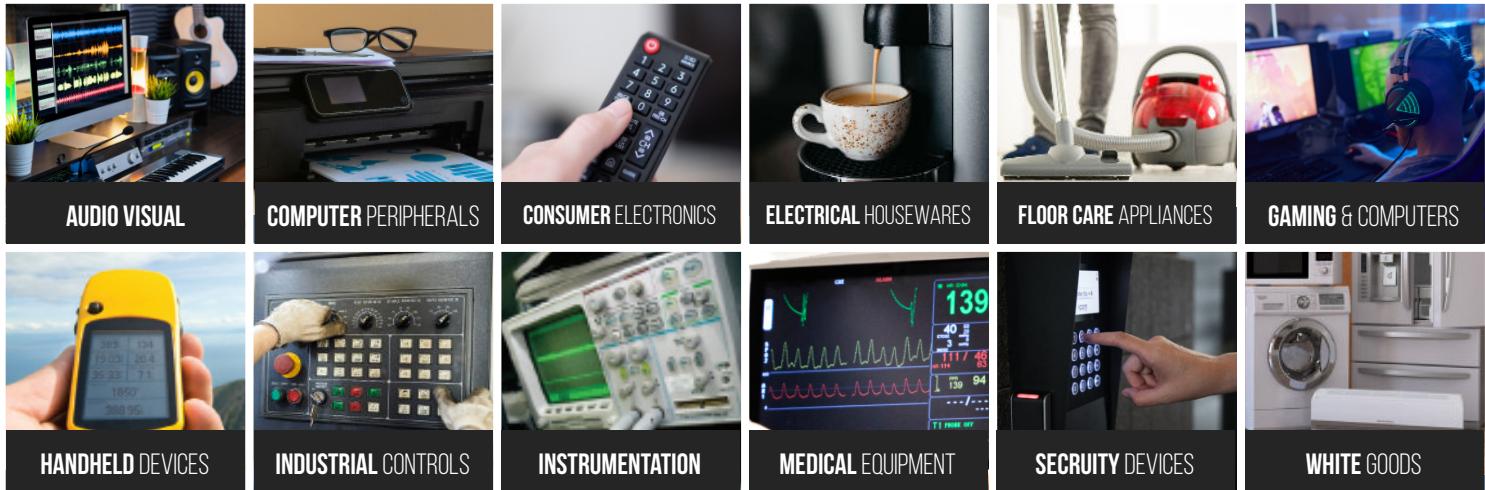

## 6. ARE THERE ANY ADDITIONAL REQUIREMENTS?

Many products have requirements that are not initially thought of. Some might make the switch more aesthetically pleasing and others will help the switch perform better under special circumstances. Below are examples that should be brought up during discussion:


- Momentary or Latching
- Illumination
- Sealed Protection (IP Rating)
- Custom Cap Options
  - » Colors
  - » Graphics
  - » Styles
- Long Life Expectancy
- High Inrush or Horse Power Rating
- Extreme Temperature Rating
- Custom User Requirements




## 6. WHAT IS THE ESTIMATED ANNUAL USAGE (EAU)?

If you are looking for a custom switch, it is important to know an accurate EAU for your project. Once we know, we are able to determine how feasible certain customizations are. Since unique requirements sometimes incur additional tooling charges, knowing in the beginning will help expedite the process.

# 2024 ADDENDUM: NPIS

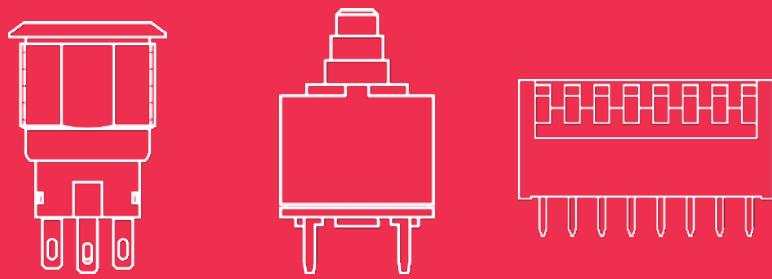


## NEW PRODUCT INTRODUCTIONS

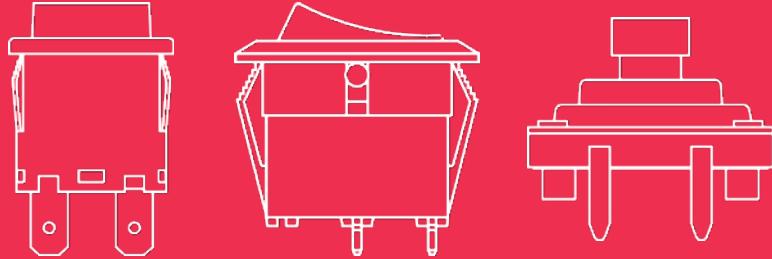


E-Switch is committed to responding to technological advancements and customer demand with the introduction of nine to 12 new switches each year. Many of these products can be customized to meet specific requirements, and each series comes with different features and functions, as well as in different shapes and sizes. E-Switch has been a trusted source of innovation for nearly 50 years, and that growth has been directly reflected in our anti-vandal (PVB3, PVHC4), tactile (TL1018, TL1030), pushbutton (PB350, E100, E200), and DIP (KAG) lines over the past 12 months. Visit [E-Switch.com](http://E-Switch.com) to learn more about these recent releases and to view their respective data sheets.



# 2024 ADDENDUM: NEW PRODUCTS

E-SWITCH®		Electrical Ratings	Cutout	Functions Available	Terminal Options	Actuator Options	Material Options	Illumination	IP Rating	General
	<b>E100</b>	3A @ 125VAC, 1.5A @ 250VAC 0.22A @ 125VDC, 0.11A @ 250VDC	<b>Diameter:</b> 16mm	1NC, 1NC+1NO, 1NC/1NC	Solder Lug (Terminal Shroud)	Illuminated or Non-Illuminated	Silver Contacts	No Lamp Neon LED Incandescent	IP65	Pushlock Turn Design
	<b>E200</b>	200mA @ 250VDC 5A @ 250VAC [VDE] 6A @ 24 VDC 8A @ 125VAC	<b>Diameter:</b> 16mm	1NO/1NC+1NO/1NC, 1NO/1NC	Solder Lug (Terminal Shroud)	Illuminated or Non-Illuminated	Silver Contacts	No Lamp Neon LED Incandescent	IP65	Pushlock Turn Design
	<b>PVB3</b>	2A, 24VDC 0.5A, 220VAC	<b>Diameter:</b> 16mm	SPDT On-(On) On-On	Solder Lug	Flat High	Stainless Steel Black Anodized	Ring Ring/Power Symbol Combo	IP65	50,000 Cycle Electrical Life
	<b>PVHC4</b>	20A, 250VAC 25A, 30VDC	<b>Diameter:</b> 19mm	SPST Off-On Off-(On)	Solder Lug	Flat High	Stainless Steel Black Anodized	Ring Ring/Power Symbol Combo	IP67	50,000 Cycle Electrical Life
	<b>PB350</b>	30mA @ 28 VDC	Through Hole, 12.4mm x 12.4mm	SPST Momentary SPDT/Double Action Momentary	PCB Pin	SPST Double Action	Gold Contacts	LED: Red, White, Yellow, Blue, Green	N/A	20,000 Cycle Electrical Life
	<b>KAG</b>	100mA @ 50VDC Non-Switching 25mA @ 24VDC Switching	Low profile	SPST each position	Gullwing	Extended Recessed with or w/o top tape seal	Gold Contacts	N/A	N/A	1-12 positions
	<b>TL1018</b>	50mA, 12VDC	SMT, 3.5mm x 2.6mm	SPST Off-(On)	With or Without Ground Terminal	160gf (Black) 240gf (Black) 340gf (Orange) 450gf (Orange)	Silver Contact Plating	N/A	N/A	3.5 x 2.6mm size
	<b>TL1030</b>	50mA, 12VDC	SMT, 3.5mm x 2.9mm	SPST Off-(On)	With or Without Ground Terminal	160gf $\pm$ 50gf (Grey) 200gf $\pm$ 50gf (White) 350gf $\pm$ 50gf (Blue) 500gf $\pm$ 100gf (Brown)	Silver Contact Plating	N/A	N/A	3.5 x 2.9mm size

# ANTI-VANDAL SWITCHES

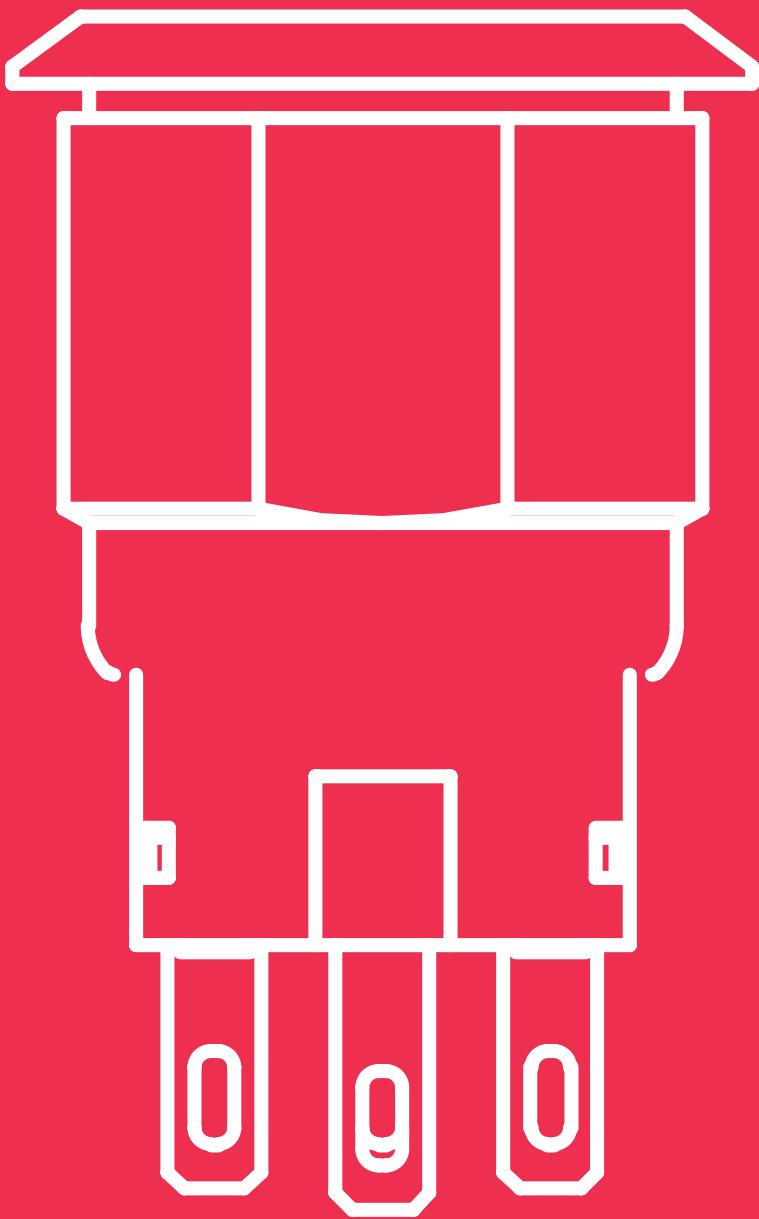

E-Switch offers the largest selection of Anti-Vandal switches in the marketplace. Sizes range from 6mm to 40mm in diameter, depending on the switch series. The Anti-Vandal series offers an aesthetically pleasing switch with quality housing materials and multi-illumination options in lens style (ring, dot, power symbol, ring/power symbol combo), as well as numerous choices in LED colors (including bi-color and RGB). Switches in these series, such as the PV and UL-certified ULV Series, are sealed to an IP65 or IP67 rating for dust and moisture resistance. Their durability and long-life expectancy make these switches excellent choices for high security locations and rugged industrial-use environments. An additional option is to order the switches pre-wired, off-the-shelf. Both the PV Series and ULV Series can be ordered with wire leads attached. E-Switch's Anti-Vandal switches can be found in public kiosks, security controls, appliances, medical equipment and transport vehicles.





E-SWITCH®		Electrical Ratings	Cutout / Panel Depth	Functions Available	Terminal Options	Actuator Options	Material Options	Illumination	IP Rating	Wire Options
	<b>PV0</b>	2A, 36VDC	<b>Diameter:</b> 12mm <b>Max. Depth:</b> 6mm	<b>1 Pole:</b> Off-(On)	Solder Lug	High	Stainless Steel Black Anodized	Dot Ring	IP65	×
	<b>PV1</b>	2A, 36VDC	<b>Diameter:</b> 19mm <b>Max. Depth:</b> 8mm	<b>1 Pole:</b> Off-(On)	Screw Solder Lug	Domed Flat High	Black Anodized Gold Plated Brass Nickel Plated Brass Stainless Steel	N/A	IP65	×
	<b>PV2</b>	2A, 36VDC	<b>Diameter:</b> 16mm <b>Max. Depth:</b> 6mm	<b>1 Pole:</b> Off-(On)	Screw Solder Lug	Domed Flat High	Black Anodized Gold Plated Brass Nickel Plated Brass Stainless Steel	N/A	IP65	×
	<b>PV3</b>	2A, 48VDC	<b>Diameter:</b> 16mm <b>Max. Depth:</b> 8mm	<b>1 Pole:</b> On-(On) <b>2 Pole:</b> On-(On)	Solder Lug	Flat Guarded High	Black Anodized Gold Plated Brass Nickel Plated Brass Stainless Steel	Bi-Color Dot Ring	IP40 or IP67	●
	<b>PV4</b>	2A, 24VDC .7A 125VAC (cURus)	<b>Diameter:</b> 19mm <b>Max. Depth:</b> 11mm	<b>1 Pole:</b> On-On On-(On) 1P Off-(On) + 1P On-(Off) <b>2 Pole:</b> On-On On-(On)	Screw Solder Lug	Flat High	Black Anodized Stainless Steel	RGB Bi-Color Dot Ring Arrow	IP65	●
	<b>PV5</b>	2A, 36VDC	<b>Diameter:</b> 12mm <b>Max. Depth:</b> 5mm	<b>1 Pole:</b> Off-(On)	Screw Solder Lug	Raised Domed	Black Anodized Nickel Plated Brass Stainless Steel	N/A	IP65	×
	<b>PV6</b>	2A, 48VDC	<b>Diameter:</b> 16mm <b>Max. Depth:</b> 10mm	<b>1 Pole:</b> Off-(On)	Solder Lug	Flat High	Black Anodized Nickel Plated Brass Stainless Steel	RGB Bi-Color Dot Ring	IP65	×
	<b>PV7</b>	2A, 48VDC	<b>Diameter:</b> 22mm <b>Max. Depth:</b> 8mm (Momentary), 12mm (Maintained)	<b>1 Pole:</b> 1P Off-On + 1P On-Off 1P Off-(On) + 1P On-(Off)	Solder Lug	Flat	Black Anodized Nickel Plated Brass Stainless Steel	RGB Bi-Color Dot Ring	IP65	●
	<b>PV8</b>	2A, 48VDC	<b>Diameter:</b> 25mm <b>Max. Depth:</b> 10mm (Momentary), 12mm (Maintained)	<b>1 Pole:</b> 1P Off-On + 1P On-Off 1P Off-(On) + 1P On-(Off) <b>2 Pole:</b> 2P Off-On + 2P On-Off 2P Off-(On) + 2P On-(Off)	Solder Lug	Flat	Black Anodized Nickel Plated Brass Stainless Steel	Bi-Color Dot Ring	IP65	●
	<b>PV9</b>	2A, 48VDC	<b>Diameter:</b> 28mm <b>Max. Depth:</b> 10mm	<b>1 Pole:</b> 1P Off-On + 1P On-Off 1P Off-(On) + 1P On-(Off) <b>2 Pole:</b> 2P Off-On + 2P On-Off 2P Off-(On) + 2P On-(Off)	Solder Lug	Flat	Nickel Plated Brass Stainless Steel	Bi-Color Dot Ring	IP66	●
	<b>PV10</b>	2A, 48VDC	<b>Diameter:</b> 40mm <b>Max. Depth:</b> 5mm	<b>1 Pole:</b> 1P Off-On + 1P On-Off 1P Off-(On) + 1P On-(Off) <b>2 Pole:</b> 2P Off-On + 2P On-Off 2P Off-(On) + 2P On-(Off)	Solder Lug	Flat	Stainless Steel	Bi-Color Dot Ring	IP65	●



 <b>E-SWITCH®</b>	Electrical Ratings	Cutout / Panel Depth	Functions Available	Terminal Options	Actuator Options	Material Options	Illumination	IP Rating	Wire Options	
	<b>CS4 CS7</b>	1A @ 5-24VDC	<b>Diameter:</b> 19mm 22mm	SPST	150mm Wire Leads with Connector	Flat	Aluminum, Clear Anodized	RGB Ring or Power Symbol	✗	●
	<b>PMV6</b>	2A @ 24VDC	<b>Diameter:</b> 22mm <b>Max. Depth:</b> 1-11mm	SPDT, DPDT	Solder Lug Wire Leads: 300mm	Flat	Plastic	None	IP65	●
	<b>PVA3</b>	2A, 36VDC	<b>Diameter:</b> 16mm <b>Max. Depth:</b> 8mm	<b>1 Pole:</b> On-On On-(On)	Solder Lug	Flat High	Black Anodized Nickel Plated Brass Stainless Steel	RGB Bi-Color Ring	IP65	✗
	<b>PVA6</b>	2A, 36VDC	<b>Diameter:</b> 16mm <b>Max. Depth:</b> 6-8mm	<b>1 Pole:</b> Off-(On)	Solder Lug Wire-Lead	Rounded Flat High	Black Anodized Clear Anodized Stainless Steel Brushed Stainless Steel	Ring Power Symbol	IP67	●
	<b>PVK4</b>	2A, 24VDC	<b>Diameter:</b> 19mm <b>Max. Depth:</b> 10.0mm	<b>SPDT</b> ON-ON ON-(ON) <b>DPDT</b> ON-ON-ON (ON)-ON-(ON)	Sold Lug	Flat	Stainless Steel	None Selector Arrow	IP40 IP65	✗
	<b>PVL</b>	✗	<b>Diameter:</b> 6-19mm <b>Max. Depth:</b> 6mm to 10mm (depending on mounting diameter)	✗	Solder Lug Wire leads: 150mm	Flat	Stainless Steel Black	Pilot Lamp	IP67	●
	<b>PVS7</b>	2A @ 24VDC	<b>Diameter:</b> 22mm <b>Max. Depth:</b> 1-11mm	SPDT, DPDT	Solder Lug Wire Leads: 300mm	Flat	Stainless Steel	RGB Ring	IP65	●
	<b>PVT4</b>	50mA, 24VDC	<b>Diameter:</b> 19mm <b>Max. Depth:</b> 6mm	<b>1 Pole:</b> Off-(On)	Solder Lug Wire-Lead	Flat	Stainless Steel	Ring	IP65	●
	<b>PZ</b>	1A@5-24VDC	<b>Diameter:</b> 19mm - 22mm <b>Max. Depth:</b> 10mm	Momentary Pulse	150mm Wire Lead 300mm Wire Lead	Concave Flat	Stainless Steel Black Anodized	RGB Ring	IP68	●
	<b>SAV4</b>	15A @ 125/250VAC	<b>Diameter:</b> 19mm <b>Max. Depth:</b> 1-11mm	<b>1 Pole:</b> 1P - ON - ON, 1P ON - (ON) Momentary	4.8 mm Quick Connect	Flat	Stainless Steel, Black Anodized	Non-illuminated, Dot, Ring, Power Symbol, Ring/Power Symbol Combo	IP67	✗
	<b>SAV7</b>	15A @ 125/250VAC	<b>Diameter:</b> 22mm <b>Max. Depth:</b> 1-11mm	<b>1 Pole:</b> 1P - ON - ON, 1P ON - (ON) Momentary	4.8 mm Quick Connect	Flat	Stainless Steel, Black Anodized	Non-illuminated, Ring, Ring/Power Symbol Combo	IP67	✗
	<b>SAV8</b>	15A @ 125/250VAC	<b>Diameter:</b> 25mm <b>Max. Depth:</b> 1-11 mm	<b>1 Pole:</b> 1P - ON - ON, 1P ON - (ON) Momentary	4.8 mm Quick Connect	Flat	Stainless Steel, Black Anodized	Non-illuminated, Ring, Ring/Power Symbol Combo	IP67	✗



E-SWITCH®		Electrical Ratings	Cutout / Panel Depth	Functions Available	Terminal Options	Actuator Options	Material Options	Illumination	IP Rating	Wire Options
	<b>SV4</b>	2A 2 36VDC	Diameter: 19mm Max. Depth: 1-6mm	1 Pole: SPST 1P OFF - (ON)	Solder Lug Wire Leads: 500mm	Flat	Stainless Steel	Ring, Ring/Power Symbol Combo	IP67	●
	<b>SV7</b>	2A 2 36VDC	Diameter: 22mm Max. Depth: 1-6mm	Pole: SPST 1P OFF - (ON)	Solder Lug Wire Leads: 500mm	Flat	Stainless Steel	Ring, Ring/Power Symbol Combo	IP67	●
	<b>SV8</b>	2A 2 36VDC	Diameter: 25mm Max. Depth: 1-6mm	1 Pole: SPST 1P OFF - (ON)	Solder Lug Wire Leads: 500mm	Flat	Stainless Steel	Ring, Ring/Power Symbol Combo	IP67	●

Specifications subject to change without notice

## UL CERTIFIED

E-SWITCH®		Electrical Ratings	Cutout / Panel Depth	Functions Available	Terminal Options	Actuator Options	Material Options	Illumination	IP Rating	Wire Options
	<b>ULV4</b>	3A 125/250VAC (cURus)	Diameter: 19mm Max. Depth: 10mm	1 Pole: On-On On-(On)  2 Pole: On-On On-(On)	Solder Lug Wire Leads: 300mm  Detachable Socket Wire Leads 500mm  Molded Boot Wire Leads: 500mm	Flat	Black Anodized Nickel Plated Brass Stainless Steel	Bi-Color Dot Ring Power	IP67	●
	<b>ULV7</b>	3A 125/250VAC (cURus)	Diameter: 22mm Max. Depth: 10mm	1 Pole: On-On On-(On)  2 Pole: On-On On-(On)	Solder Lug Wire Leads: 300mm  Detachable Socket Wire Leads 500mm  Molded Boot Wire Leads: 500mm	Flat	Anodized Aluminum Stainless Steel	Bi-Color Ring Ring w/ Power	IP67	●
	<b>ULV8</b>	3A 125/250VAC (cURus)	Diameter: 25mm Max. Depth: 10mm	1 Pole: On-On On-(On)  2 Pole: On-On On-(On)	Solder Lug Wire Leads: 300mm  Detachable Socket Wire Leads 500mm  Molded Boot Wire Leads: 500mm	Flat	Black Anodized Stainless Steel	Ring Bi-color	IP67	●

Specifications subject to change without notice

## Get Wired with E-Switch


E-Switch offers several terminal options which will enhance your production line and your bottom line. Selecting the right terminal option for your product assembly process will provide time and costs savings from:

- No need to second-source wire leads and assembly house.
- Reduce labor cost by ordering your switches pre-wired before arrival on your manufacturing floor.
- Decrease product assembly time with the ease of installing behind the panel.

The Anti-Vandal switch (aka Vandal-Resistant, Vandal-Proof, Tamper-Resistant or Tamper Proof) was designed to be installed in devices that are susceptible to harsh use, vandalism and theft, as well as to withstand extreme temperatures and to be resistant to dust and moisture. The wired options are color-coded for convenience and are compatible with a variety of connectors.


Head to [e-switch.com/resources/get-wired-with-e-switch](http://e-switch.com/resources/get-wired-with-e-switch) to find out more about our wired options.

Terminal Options: Anti-Vandal Series ULV				
Anti-Vandal Series	Solder Lug	Terminal Option W Wire Leads Attached 300mm Long	Terminal Option M Molded Protective Boot with wire leads	Terminal Option P Detachable Socket with wire leads
ULV4				
ULV7				
ULV8				

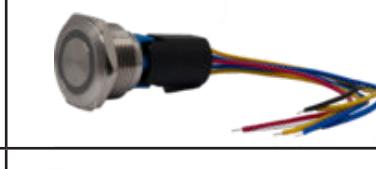Terminal Options: Anti-Vandal Series PV				
Anti-Vandal Series	Solder Lug	Wire Leads Attached 300mm long	PVP Detachable Socket with Solder Lug	PVP Detachable Socket with Wire Leads
PV3				
PV4				
PV7				
PV6			✗	✗
PV8			✗	
PV9			✗	
PV10			✗	



# PUSHBUTTON SWITCHES

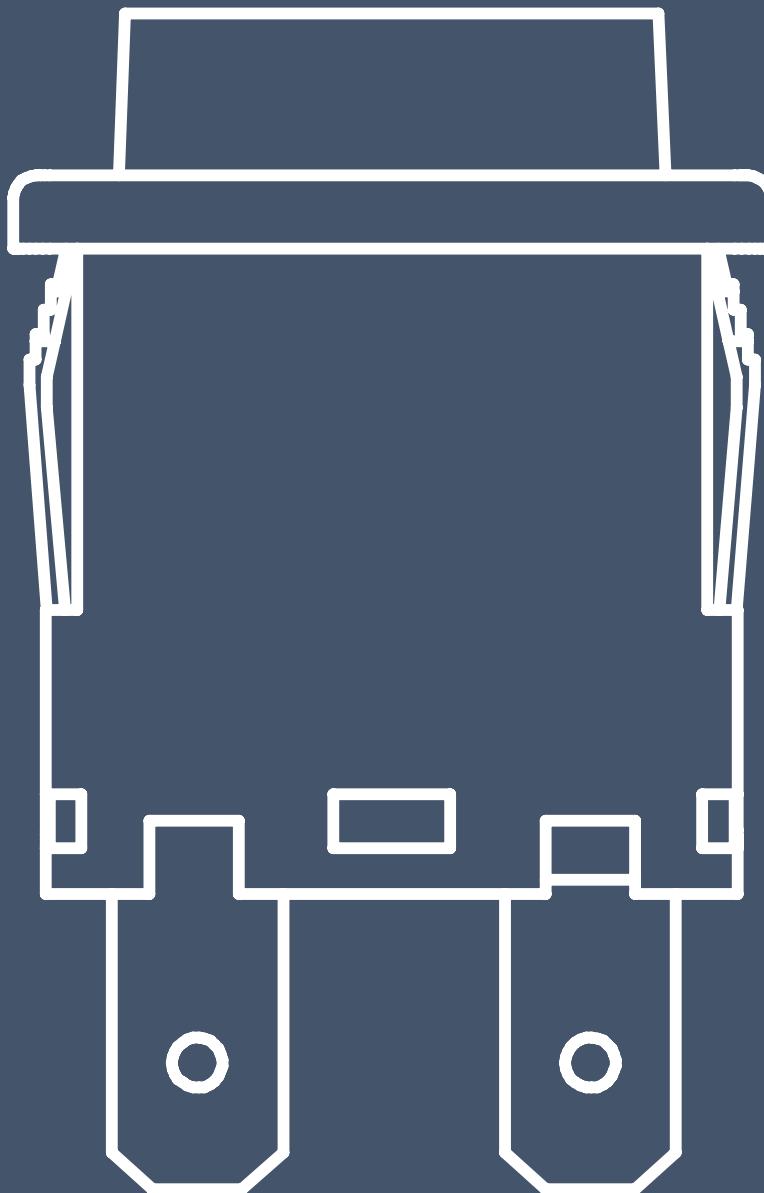

Pushbutton switches open or close an electrical circuit by pressing or, in some cases, pulling on the actuator. Deciding on the size, style and functionality of the Pushbutton is often determined by the application. E-Switch offers a wide range of Pushbutton switches, from miniature size with low current ratings to industrial use switches with high power and horsepower ratings. Several Pushbutton switches provide an IP rating of IP54, IP65 or IP67, depending on the switch series. With E-Switch, the possibilities of shapes and styles are endless. Shape options include square, round, oval and rectangle, while some switches offer caps. Multiple termination options are available within the Pushbutton family — solder lug, PCB pin, right angle PCB pins, vertical PCB pins, surface mount, socket and tab.





 <b>E-SWITCH®</b>		General Ratings	Electrical Ratings	Travel	Poles / Throws / Functions	Bushing Options	Terminal Options	Ingress Protection
	<b>700</b>	<p><b>Life Cycles:</b> 50,000  <b>Operating Force:</b> 200gf  <b>Operating Temperature:</b> -30°C to 85°C  <b>Contact Resistance:</b> 20mΩ Max.  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	<p><b>Silver:</b>            3A, 120VAC [cURus]            3A, 28VDC            1A, 250VAC [cURus]</p> <p><b>Gold:</b>            0.4VA, Max. 20V (AC or DC)</p>	1.0mm	<p><b>SPDT:</b>            On-(On)</p> <p><b>DPDT:</b>            On-(On)</p>	Flat Non-Threaded Flat Threaded Keyway Non-Threaded Keyway Threaded	Right Angle PCB Pin Solder Lug Vertical PCB Pin Vertical PCB Pin with Bracket Wire Wrap	<b>X</b>
	<b>700A</b>	<p><b>Life Cycles:</b> 50,000  <b>Operating Force:</b> 300gf  <b>Operating Temperature:</b> -30°C to 85°C  <b>Contact Resistance:</b> 20mΩ Max.  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	<p><b>Silver:</b>            3A, 120VAC [cURus]            3A, 28VDC            1A, 250VAC [cURus]</p> <p><b>Gold:</b>            0.4VA, Max. 20V (AC or DC)</p>	1.0mm	<p><b>SPDT:</b>            On-(On)</p> <p><b>DPDT:</b>            On-(On)</p>	Non-Threaded Threaded	Right Angle PCB Pin Solder Lug Vertical PCB Pin Vertical PCB Pin with Bracket	IP67
	<b>700C</b>	<p><b>Life Cycles:</b> 50,000  <b>Operating Force:</b> 400gf SP7, 600gf DP7  <b>Operating Temperature:</b> -30°C to 85°C  <b>Contact Resistance:</b> 20mΩ Max.  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	<p><b>Silver:</b>            3A, 120VAC [cURus]            3A, 28VDC            1A, 250VAC [cURus]</p> <p><b>Gold:</b>            0.4VA, Max. 20V (AC or DC)</p>	3.0mm	<b>SPDT:</b> On-On	Flat Non-Threaded Flat Threaded Keyway Non-Threaded Keyway Threaded	Right Angle PCB Pin Solder Lug Vertical PCB Pin Vertical PCB Pin with Bracket	<b>X</b>
	<b>800</b>	<p><b>Life Cycles:</b> 50,000  <b>Operating Force:</b> 200gf  <b>Operating Temperature:</b> -30°C to 85°C  <b>Contact Resistance:</b> 10mΩ Max.  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	<p><b>Silver:</b>            3A, 120VAC [cURus]            3A, 28VDC            1A, 250VAC [cURus]</p> <p><b>Gold:</b>            0.4VA, Max. 20V (AC or DC)</p>	0.9mm	<p><b>SPST</b>            Off-(On)</p> <p><b>SPDT</b>            On-(On)</p>	Flat Non-Threaded Flat Threaded Non-Threaded	Right Angle PCB Pin Solder Lug Right Angle PCB Pin with Bracket Vertical PCB Pin Vertical PCB Pin with Bracket	<b>X</b>
	<b>800A</b>	<p><b>Life Cycles:</b> 50,000  <b>Operating Force:</b> 200gf  <b>Operating Temperature:</b> -30°C to 85°C  <b>Contact Resistance:</b> 10mΩ Max.  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	<p><b>Silver:</b>            3A, 120VAC or 28VDC [cURus]            1A, 250VDC</p> <p><b>Gold:</b>            0.4VA, Max. 20V (AC or DC)</p>	0.9mm	<p><b>SPST</b>            Off-(On)</p> <p><b>SPDT</b>            On-(On)</p>	Non-Threaded	Right Angle PCB Pin Vertical PCB Pin	IP67
	<b>800B</b>	<p><b>Life Cycles:</b> 50,000  <b>Operating Force:</b> 200gf  <b>Operating Temperature:</b> -30°C to 85°C  <b>Contact Resistance:</b> 20mΩ Max.  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	<b>Gold:</b> 0.4VA, Max. 20V (AC or DC)	0.9mm	<p><b>SPST</b>            Off-(On)</p> <p><b>SPDT</b>            On-(On)</p>	Non-Threaded	Surface Mount	<b>X</b>
	<b>800C</b>	<p><b>Life Cycles:</b> 6,000  <b>Operating Force:</b> 350gf  <b>Operating Temperature:</b> -30°C to 85°C  <b>Contact Resistance:</b> Silver: 50mΩ Max initial            Gold: 20mΩ Max initial  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	<p><b>Silver:</b>            3A, 120VAC or 28VDC            1A, 250VAC</p> <p><b>Gold:</b>            0.4VA, Max. 20V (AC or DC)</p>	Electrical Make: 1.34mm Full travel: 1.88mm	<b>SPDT</b> On-On	Right Angle PCB Pin Solder Lug Vertical PCB Pin	<b>X</b>	<b>X</b>
	<b>800U</b>	<p><b>Life Cycles:</b> 6,000  <b>Operating Force:</b> 250gf  <b>Operating Temperature:</b> -30°C to 85°C  <b>Contact Resistance:</b> 100mΩ Initial  <b>Insulation Resistance:</b> 500MΩ Min.</p>	<b>Gold:</b> 0.4VA, Max. 20V (AC or DC)	1.0mm	<p><b>SPDT</b>            On-(On)</p> <p><b>DPDT</b>            On-(On)</p>	Non-Threaded	PC thru-hole Right Angle, PC thru-hole Vertical Right angle, PC thru-hole	IP67
	<b>TL2233</b>	<p><b>Life Cycles:</b> 10,000 Cycles  <b>Operating Temp:</b> -10°C to 60°C  <b>Contact Resistance:</b> 100mΩ Max. (Initial)  <b>Insulation Resistance:</b> 10MΩ Min. at 100VDC</p>	100mA @ 30VDC	1.90mm	DPDT	Non-Threaded	SMT Gull Wing	IP67

Specifications subject to change without notice

# PUSHBUTTON SWITCHES

PCB MOUNT



E-SWITCH®		General Ratings	Electrical Ratings	Operating Force	Travel	Poles / Throws	Mounting Options	Terminal Options	Illumination	Ingress Protection
	<b>5500</b>	<p><b>Life Cycles:</b> 500,000</p> <p><b>Operating Temperature:</b> -25°C to 65°C</p> <p><b>Contact Resistance:</b> 50mΩ Max.</p> <p><b>Insulation Resistance:</b> 50MΩ Min.</p>	300mA, 12VDC	255gf Max.	2.5mm	SPDT	PCB	PCB Pin	1 or 2 Dot	×
	<b>FS5700</b>	<p><b>Life Cycles:</b> 30,000</p> <p><b>Operating Temperature:</b> -10°C to 70°C</p> <p><b>Contact Resistance:</b> 50mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min. @ 500VDC</p>	1A, 9VDC	1000gf to 3000gf	2.7mm to 5.0mm	SPDT DPDT 3PDT	PCB Panel Mount	PCB Pin Solder Lugs	×	×
	<b>KS1100</b>	<p><b>Life Cycles:</b> 50,000,000</p> <p><b>Operating Temperature:</b> -10°C to 70°C</p> <p><b>Contact Resistance:</b> 100mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min. @ 100VDC</p>	10mA, 12VDC	60gf	4.0mm	SPST	PCB	PCB Pin	×	×
	<b>LC</b>	<p><b>Life Cycles:</b> 10,000</p> <p><b>Operating Temperature:</b> -20°C to 85°C</p> <p><b>Contact Resistance:</b> 20mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	300mA, 30VDC	200gf to 330gf	3.5mm	SPDT DPDT	PCB	Right Angle PCB Pin	×	×
	<b>LP11</b>	<p><b>Life Cycles:</b> 1,000,000</p> <p><b>Operating Temperature:</b> -40°C to 85°C</p> <p><b>Contact Resistance:</b> 200mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	100mA, 12VDC	160(M) 200(L)	4.5mm (M) 3.5mm (L)	SPST	PCB	PCB Pin	RGB Full	×
	<b>LP15</b>	<p><b>Life Cycles:</b> 300,000</p> <p><b>Operating Temperature:</b> -20°C to 70°C</p> <p><b>Contact Resistance:</b> 200mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	1mA, 20VDC	125gf	1.3mm	SPST	PCB	PCB Pin	Full	×
	<b>LP16</b>	<p><b>Life Cycles:</b> 50,000,000</p> <p><b>Operating Temperature:</b> -5°C to 60°C</p> <p><b>Contact Resistance:</b> 150mΩ Max.</p> <p><b>Insulation Resistance:</b> 10MΩ Min.</p>	100mA, 20VDC	250gf	3.3mm	SPST	PCB	PCB Pin	Full	×
	<b>LP2</b>	<p><b>Life Cycles:</b> 300,000</p> <p><b>Operating Temperature:</b> -20°C to 70°C</p> <p><b>Contact Resistance:</b> 200mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	1mA, 20VDC 5mA, 5VDC	125gf	1.3mm	SPST	PCB	PCB Pin	Full	×
	<b>LP37</b>	<p><b>Life Cycles:</b> 30,000</p> <p><b>Operating Temperature:</b> -30°C to 85°C</p> <p><b>Contact Resistance:</b> 50mΩ Max.</p> <p><b>Insulation Resistance:</b> 1,000MΩ Min. at 100VDC</p>	20mVDC to 50VDC; 10mA to 250mA	250gf ± 100gf	Full: 5.1mm ± 0.5mm;	SPDT	PCB	PCB Pin	Full	×

Specifications subject to change without notice



E-SWITCH®		General Ratings	Electrical Ratings	Operating Force	Travel	Poles / Throws	Mounting Options	Terminal Options	Illumination	Ingress Protection
	<b>LP4</b>	<p><b>Life Cycles:</b> 50,000</p> <p><b>Operating Temperature:</b> -20°C to 70°C</p> <p><b>Contact Resistance:</b> 50mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	100mA, 30VDC	250gf	<p><b>Full:</b> 1.5mm</p> <p><b>Latching:</b> 1.0mm</p>	DPDT	PCB	PCB Pin	Full	✗
	<b>LP6</b>	<p><b>Life Cycles:</b> 200,000</p> <p><b>Operating Temperature:</b> -20°C to 70°C</p> <p><b>Contact Resistance:</b> 50mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	12mA, 12VDC	150gf SPST 200gf DPST	2.2mm	SPST DPST	PCB	PCB Pin	RGB Full	✗
	<b>PBH</b>	<p><b>Life Cycles:</b> 6,000</p> <p><b>Operating Temperature:</b> -20°C to 70°C</p> <p><b>Contact Resistance:</b> 100mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	100mA, 30VDC	230gf DPDT 280gf 4PDT 380gf 6PDT	5.5mm	DPST DPDT	PCB	Right Angle PCB Pin	✗	✗
	<b>PB300</b>	<p><b>Life Cycles:</b> 20,000</p> <p><b>Operating Temperature:</b> -40°C to 95°C</p> <p><b>Contact Resistance:</b> 50mΩ Max. Initial</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	30mA, 28VDC	ST: 490gf DT 1st position: 600gf 2nd position: 1150gf	2.0mm	SPST SPDT	SPST SPDT	PCB Pin	✗	✗
	<b>PB400</b>	<p><b>Life Cycles:</b> 6,000 Cycles</p> <p><b>Operating Temperature:</b> -5°C to 60°C</p> <p><b>Contact Resistance:</b> 30mΩ Max.</p> <p><b>Insulation Resistance:</b> 500MΩ Min.v</p>	3A, 30VDC	3N-7N	1.8-3.2mm	DPST	PCB	PCB Pin	✗	✗
	<b>TL2201</b> <b>TL4201</b>	<p><b>Life Cycles:</b> 10,000</p> <p><b>Operating Temperature:</b> -20°C to 70°C</p> <p><b>Contact Resistance:</b> 100mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	100mA, 30VDC	220gf DPDT 300gf 4PDT	2.5mm	DPDT 4PDT	PCB	PCB Pin	✗	✗
	<b>TL2202</b>	<p><b>Life Cycles:</b> 10,000</p> <p><b>Contact Resistance:</b> 100mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	100mA 30VDC	220gf	2.5mm	DPDT	PCB	PCB Pin	✗	✗
	<b>TL2203</b>	<p><b>Life Cycles:</b> 10,000</p> <p><b>Operating Temperature:</b> -20°C to 70°C</p> <p><b>Contact Resistance:</b> 100mΩ Max.</p> <p><b>Insulation Resistance:</b> 100MΩ Min.</p>	100mA, 30VDC	180gf	1.9mm	DPDT	PCB	PCB Pin	✗	✗

Specifications subject to change without notice



E-SWITCH®		General Ratings	Electrical Ratings	Operating Force	Travel	Poles / Throws	Mounting Options	Terminal Options	Illumination	Ingress Protection
	<b>TL2205</b>	<b>Life Cycles:</b> 10,000 <b>Operating Temperature:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	100mA, 30VDC	250gf	<b>Full:</b> 2.5mm <b>Lock:</b> 1.5mm	DPDT	PCB	PCB Pin	Dot	×
	<b>TL2230</b>	<b>Life Cycles:</b> 10,000 <b>Operating Temperature:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	100mA, 30VDC	140gf 230gf	1.8mm	DPDT	PCB	PCB Pin	×	×
	<b>TL2285</b>	<b>Life Cycles:</b> 10,000 <b>Operating Temperature:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	100mA, 30VDC	180gf	2.5mm	DPDT	PCB	PCB Pin	×	×
	<b>ULP</b>	<b>Life Cycles:</b> 200,000 Cycles <b>Operating Temperature:</b> -40°C to 85°C <b>Contact Resistance:</b> 50mΩ Silver, 100mΩ Gold <b>Insulation Resistance:</b> 100MΩ at 500VDC	Gold: 0.1A Max. @ 28VDC;  Silver: 0.5A @ 25VDC; 0.2A @ 250VAC	SPDT: 200gf ±  DPDT: 300gf	2.20mm	SPDT  PDT	PCB Panel Mount	PCB Pin Solder Lug	RGB Full	×
	<b>WBL</b>	<b>Life Cycles:</b> 10,000 <b>Operating Temperature:</b> -20°C to 70°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	300mA, 30VDC	200gf	<b>Full:</b> 3.3mm <b>Lock:</b> 2.5mm	DPDT 4PDT	PCB	Right Angle PCB Pin	Full	×

Specifications subject to change without notice



E-SWITCH®		General Ratings	Electrical Ratings	Operating Force	Travel	Poles / Throws / Functions	Panel Cutout Dimesnions	Terminal Options	Illumination	Ingress Protection
	<b>700</b>	<p><b>Life Cycles:</b> 50,000  <b>Operating Force:</b> 200gf  <b>Operating Temperature:</b> -30°C to 85°C  <b>Contact Resistance:</b> 20mΩ Max.  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	<p><b>Silver:</b> 3A, 120VAC [cURus] 3A, 28VDC 1A, 250VAC [cURus]</p> <p><b>Gold:</b> 0.4VA, Max. 20V (AC or DC)</p>	200gf	1.0mm	<p><b>SPDT:</b> On-(On)</p> <p><b>DPDT:</b> On-(On)</p>	12.7mm x 15.7mm	Quick Connect Solder Lug	×	×
	<b>D16</b>	<p><b>Electrical / Mechanical Life:</b> 50,000 / 100,000 Cycles  <b>Operating Temperature:</b> -20°C to 55°C  <b>Contact Resistance:</b> 100mΩ Max.  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	<p>8A, 125VAC [cURus, CSA]</p> <p>6A, 24VDC [cURus, CSA]</p>	300gf	3.0mm	<p><b>SPDT, DPDT, 3PDT, 4PDT</b> On-On On-(On)</p>	16mm Diameter	Solder Lug	Full	×
	<b>KJD17</b>	<p><b>Electrical Life:</b> 10,000 Cycles  <b>Operating Temperature:</b> -25°C to 55°C  <b>Contact Resistance:</b> 50mΩ Max.  <b>Insulation Resistance:</b> 100MΩ Min. at 500VDC</p>	<p>16A 120VAC [cURus UL508] 16A 220/240VAC [cURus UL508] 1/2 HP 120VAC [cURus UL508] 2HP 220/240VAC [cURus UL508]</p>	N/A	N/A	<p>Off-On Off-On w/Remote Trip</p> <p>NO+NC w/Remote Trip</p>	46mm x 22mm	Silver Plated Brass	×	IP54 with PVC Cap
	<b>L16</b>	<b>Operating Temperature:</b> -25°C to 55°C	N/A	N/A	N/A	Signal Light	16mm Diameter	Solder Lug	Full Signal Light	×
	<b>LA</b>	<p><b>Electrical / Mechanical Life:</b> 50,000 / 100,000 Cycles  <b>Operating Temperature:</b> -20°C to 55°C  <b>Contact Resistance:</b> 100mΩ Max.  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	<p>8A, 125VAC [cURus] 5A, 250VAC [cURus] 2A, 250VDC [cURus] 6A, 24VDC [cURus]</p>	300gf	3.0mm	<p><b>SPDT, DPDT, 3PDT, 4PDT</b> On-On On-(On)</p>	<p>22mm Diameter 25.5mm Diameter 30.5mm Diameter</p>	Socket Solder Tab	Full Signal Light	IP65
	<b>LB22</b>	<p><b>Electrical / Mechanical Life:</b> 500,000 Cycles 1,000,000 Cycles  <b>Operating Temperature:</b> -20°C to 55°C  <b>Contact Resistance:</b> 50mΩ Max. @1A 12VDC  <b>Insulation Resistance:</b> 1,000 MΩ Min. @ 500VDC</p>	3A @ 250VAC	<p><b>SPDT:</b> 2.5±1N ;</p> <p><b>DPDT:</b> 3.5±1N</p>	3.20mm	<p><b>SPDT , DPDT</b> ON-ON ON-(ON)</p>	22mm Diameter	Solder Lug	Full Power Symbol	IP65
	<b>LP1</b>	<p><b>Electrical / Mechanical Life:</b> 50,000 / 50,000 Cycles  <b>Operating Temperature:</b> -40°C to 85°C  <b>Contact Resistance:</b> 50mΩ Max.  <b>Insulation Resistance:</b> 100MΩ Min.</p>	100mA, 30VDC	250gf	1.8mm	<p><b>SPST</b> Off-(On)</p>	8mm Diameter	Solder Lug	Full	×
	<b>P16</b>	<p><b>Electrical / Mechanical Life:</b> 50,000 / 100,000 Cycles  <b>Operating Temperature:</b> -20°C to 55°C  <b>Contact Resistance:</b> 100mΩ Max.  <b>Insulation Resistance:</b> 1,000MΩ Min.</p>	8A, 125VAC cURus 6A, 24VDC	300gf	3.0mm	<p><b>SPDT, DPDT, 3PDT, 4PDT</b> On-On On-(On)</p>	16mm Diameter	Socket	Full	×




 <b>E-SWITCH®</b>		General Ratings	Electrical Ratings	Operating Force	Travel	Poles / Throws / Functions	Panel Cutout Dimesnions	Terminal Options	Illumination	Ingress Protection
	<b>PA4</b>	<b>Electrical / Mechanical Life:</b> 10,000 / 50,000 Cycles <b>Operating Temperature:</b> -20°C to 65°C -20°C to 125°C <b>Contact Resistance:</b> 20mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	16A, 125VAC [cURus] 16A, 250VAC [cURus] 16(4)A, 250VAC [ENECA] 16(8)A, 250VAC [ENECA]	500gf	4.5mm	<b>SPST</b> Off-On Off-(On)	13mm x 19mm PCB	PCB Pin Solder Tab	Full	IP54
	<b>PA5</b>	<b>Electrical / Mechanical Life:</b> 10,000 / 50,000 Cycles <b>Operating Temperature:</b> -20°C to 125°C <b>Contact Resistance:</b> 20mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	16A, 125VAC [cURus] 16A, 250VAC [cURus] 16(4)A, 250VAC [ENECA] 16(8)A, 250VAC [ENECA]	500gf	5.5mm	<b>SPST</b> Off-On Off-(On) <b>DPST</b> Off-On Off-(On)	Capture Mount PCB	PCB Pin Solder Tab	✗	✗
	<b>PB1973</b>	<b>Electrical / Mechanical Life:</b> 10,000 / 30,000 Cycles <b>Operating Temperature:</b> -10°C to 55°C <b>Contact Resistance:</b> 20mΩ Max. <b>Insulation Resistance:</b> 1,000MΩ Min.	15A, 125VAC [cURus] 15A, 250VAC [cURus]	300gf to 800gf	2.8mm	<b>SPST</b> Off-On Off-(On) <b>DPST</b> Off-On Off-(On)	13mm x 19.2mm	Tab	Full	✗
	<b>PB2</b>	<b>Electrical / Mechanical Life:</b> 6,000 / 50,000 Cycles <b>Operating Temperature:</b> -20°C to 85°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 5MΩ Min.	20A, 125VAC [UR] 12A, 250VAC [UR]	600gf	3.1mm	<b>SPST</b> Off-On On-On <b>DPST</b> Off-On On-On	22mm x 30mm	Tab	Dot	IP54
	<b>PB66</b>	<b>Electrical Life:</b> 50,000 Cycles <b>Operating Temperature:</b> 0°C to 55°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 2MΩ MIN @ 500VDC	16(16)A 127VAC, UL	13N	1.5mm (Operating) 4.5mm (Lock Off) <b>Total:</b> 6mm	<b>DPST</b> Off-On Latching	25mm Diameter	Tab	Power Symbol Illuminated	IP66
	<b>PP1</b>	<b>Electrical / Mechanical Life:</b> 6,000 / 50,000 Cycles <b>Operating Temperature:</b> 0°C to 85°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 2MΩ Min.	16A, 125VAC [cURus] 12A, 250VAC [cURus] 1HP, 125/250VAC [cURus]	300gf to 500gf	<b>Push Only</b> Push: 9.4mm <b>Push-Pull</b> Push: 5.0mm Pull: 5.7mm	<b>SPDT</b> On-2-On-(On2) Push-Pull On-(On)	13.3mm x 28.2mm	Tab	✗	✗
	<b>PP2</b>	<b>Electrical / Mechanical Life:</b> 6,000 / 50,000 Cycles <b>Operating Temperature:</b> 0°C to 85°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 10MΩ Min.	<b>Rating Option 1:</b> 10R(4)A 277VAC 5E4 [UL]  <b>Rating Option 2:</b> 16A, 125VAC [cURus] 12A, 250VAC [cURus] 1HP, 125/250VAC [cURus]	300gf to 500gf	<b>Push Only</b> Push: 9.4mm <b>Push-Pull</b> Push: 5.0mm Pull: 5.7mm	<b>DPDT</b> On-2-On-(On2) Push-Pull On-(On)	13.5mm x 36mm	Tab	✗	✗
	<b>RP3508</b>	<b>Electrical / Mechanical Life:</b> 6,000 / 20,000 Cycles <b>Operating Temperature:</b> 0°C to 65°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 1,000MΩ Min.	3A, 125VAC [cURus] 1.5A, 250VAC [cURus]	500gf	3.5mm	<b>SPST</b> Off-On Off-(On)	16mm Diameter	Solder Lug	Full	✗

Specifications subject to change without notice




 <b>E-SWITCH®</b>		General Ratings	Electrical Ratings	Operating Force	Travel	Poles / Throws / Functions	Panel Cutout Dimensions	Terminal Options	Illumination	Ingress Protection
	<b>RP8100</b>	<b>Electrical / Mechanical Life:</b> 500,000 Cycles <b>Operating Temperature:</b> -30°C to 85°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 1,000MΩ Min.	125mA, 125 VAC 100mA, 50 VDC	350gf	1.5mm	<b>SPST</b> Off-(On)	13.6mm Diameter	Solder Lug Wire Leads	Dot	IP67
	<b>RP8200</b>	<b>Electrical / Mechanical Life:</b> 200,000 Cycles <b>Operating Temperature:</b> -30°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 1,000MΩ Min.	100mA, 24VDC	560gf	2.5mm	<b>SPST</b> Off-On	13.6mm Diameter	Solder Lug	Dot	IP67
	<b>RP8300</b>	<b>Electrical / Mechanical Life:</b> 500,000 Cycles <b>Operating Temperature:</b> -30°C to 85°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 1,000MΩ Min.	200mA, 50VDC	350gf	1.5mm	<b>SPST</b> Off-(On)	13.6mm Diameter	Solder Lug	Dot	IP67
	<b>RP8400</b>	<b>Electrical / Mechanical Life:</b> 500,000 Cycles <b>Operating Temperature:</b> -30°C to 85°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 1,000MΩ Min.	200mA, 50VDC	350gf	<b>1.5mm</b>	<b>SPST</b> Off-(On)	13.6mm Diameter	Solder Lug	Dot	IP67
	<b>RP8500</b>	<b>Electrical / Mechanical Life:</b> 500,000 Cycles <b>Operating Temperature:</b> -30°C to 85°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 1,000MΩ Min.	125mA, 125VAC 100mA, 50VDC	350gf	<b>SPST</b> Off-(On)	Solder Lug	13.6mm Diameter	Solder Lug	Dot	IP67
	<b>RP8600</b>	<b>Electrical / Mechanical Life:</b> 50,000 / 100,000 Cycles <b>Operating Temperature:</b> -30°C to 85°C <b>Contact Resistance:</b> 200mΩ Initial @2-4VDC, 100mA <b>Insulation Resistance:</b> 100MΩ @500VDC	0.4VA Max @20V Max (AC or DC)	630gf	0.65mm	<b>SPST</b> Off-(On)	16.0mm Diameter	Solder Lug	<b>X</b>	IP67
	<b>ULP</b>	<b>Electrical / Mechanical Life:</b> 200,000 / 1,000,000 Cycles <b>Operating Temperature:</b> -20°C to 70°C <b>Contact Resistance:</b> 50mΩ Max. (Silver) 100mΩ Max. (Gold) <b>Insulation Resistance:</b> 100MΩ Min.	<b>Silver:</b> 500mA, 25VDC  <b>Gold:</b> 0.4VA, Max. at 28V (AC or DC)	<b>SPDT</b> 200gf  <b>DPDT</b> 300gf	2.2mm	<b>SPDT</b> On-On On-(On)  <b>DPST</b> On-On On-(On)	15.8mm x 16mm PCB  15.8mm x 18mm Panel Mount Cut-out size	<b>Specified</b> <b>Subject to change</b> <b>without notice</b> Solder Lug	Full	N/A

# TACTILE SWITCHES

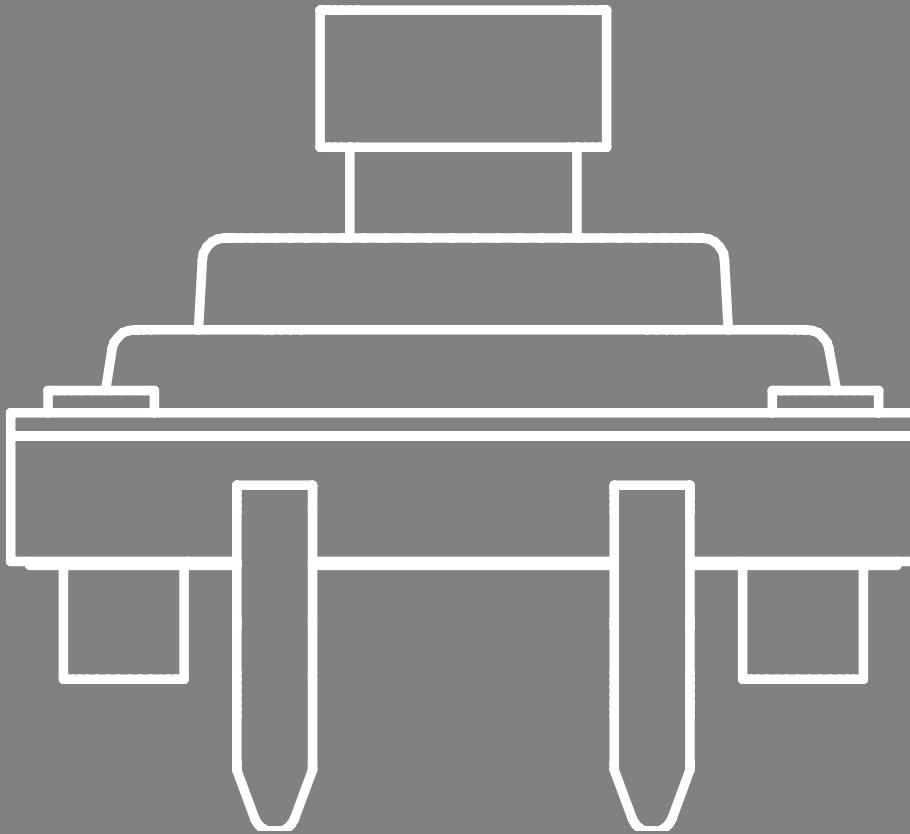

Tactile, a.k.a Tact, switches are used to close an electrical circuit when pressed. When the switch is released, it opens the circuit. Tact switches come in a wide range of styles and sizes. E-Switch offers Tact switches from miniature to 12.4mm square in size and numerous styles — illuminated, non-illuminated, caps, round, square, rectangle and oval. Tact switches typically offer two mounting options, surface mount or thru-hole mount, and some right-angle options. Several Tact switches have very low profiles, from 0.35mm – 0.65mm and up. Reliability, long operation life and compact size make tact switches ideal for the growing market of wearable technology and handheld devices. Several other common markets include audio/visual equipment, telecommunications, computer electronics and peripheral equipment, instrumentation controls and medical devices.

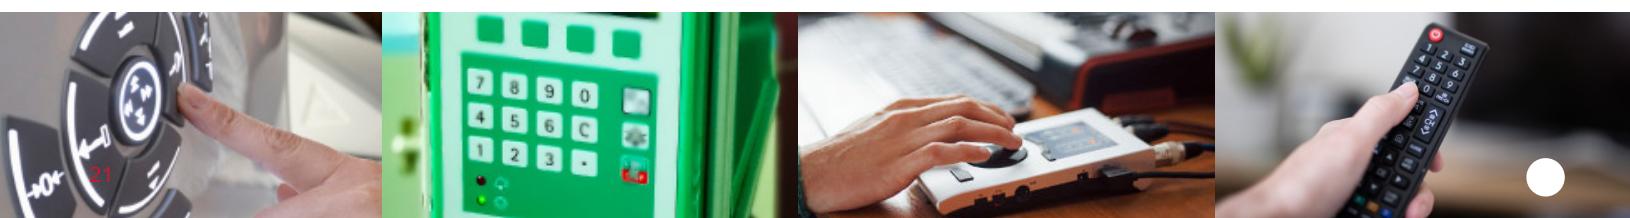





E-SWITCH®	General Ratings	Electrical Ratings	Travel	Dimensions	Operating Force (gf)	Mounting Options	Ingress Protection	
	<b>320</b>	Multiple Actuator Styles <b>Life Cycles:</b> 1,000,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 1,000MΩ Min.	25mA, 50VDC	0.6mm	12.4mm x 12.4mm 12.4mm x 22.0mm	135	PCB Pin	
	<b>TL1014</b>	<b>Life Cycles:</b> up to 200,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm (160 gf) 0.30mm (220 gf)	4.7mm x 3.5mm	160, 220	SMT (Gull Wing)	
	<b>TL1015</b>	<b>Life Cycles:</b> 200,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.20mm	2.9mm x 3.9mm	160	SMT (Gull Wing)	
	<b>TL1016</b>	<b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 500mΩ Max. (Initial) <b>Insulation Resistance:</b> 100MΩ Min at 100VDC.	50mA, 12VDC	0.20mm +0.2/-0.1mm	3.5mm x 2.9mm	160gf + 70/-40gf 220gf + 80/-70gf	Boss Pin Ground Terminal SMT (Gull Wing)	
	<b>TL1017</b>	<b>Life Cycles:</b> 200,000 cycles for 160gf 100,000 cycles for 260gf <b>Operating Temperature:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. (Initial) <b>Insulation Resistance:</b> 100MΩ Min. at 500VDC	50mA, 12VDC	0.15mm ± 0.1mm	4mm x 2.5mm	160gf ± 50gf; 260gf ± 50gf	SMT (Gull Wing)	
	<b>TL1100</b>	Multiple Actuator Styles <b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.3mm	12.0mm x 12.0mm	160, 260	PCB Pin	
	<b>TL1105</b>	Caps Available <b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	6.0mm x 6.0mm	100, 160, 250	PCB Pin	
	<b>RT1105</b>	<b>Life Cycles:</b> 100,000 Cycles <b>Operating Temp:</b> -20°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. (Initial) <b>Insulation Resistance:</b> 100MΩ Min. at 100VDC	12VDC, 50mA	0.25mm	6.60 x 6.60	160gf ± 50gf 260gf +100/-50gf 350gf +100/-50gf	Top Actuated Through-hole, Reverse	
	<b>RT3301</b>	<b>Life Cycles:</b> 100,000 cycles <b>Operating Temperature:</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. (Initial) <b>Insulation Resistance:</b> 100MΩ Min. at 100VDC	50mA, 12VDC	0.25mm +0.2mm / -0.1mm	6.00mm x 6.00mm	100gf ± 30gf 160gf ± 50gf 260gf ± 50gf 320gf ± 70gf	Top Actuated, Reverse Surface Mount Design	
	<b>TL1107</b>	Multiple Actuator Styles <b>Life Cycles:</b> 30,000 (260gf), 50,000 (130gf & 180gf) <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	3.5mm x 6.0mm	130, 180, 260	PCB Pin	
	<b>TL1220</b>	Caps Available <b>Life Cycles:</b> 500,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.2mm	7.5mm x 7.5mm 10.0mm x 14.0mm 10.0mm x 19.0mm 7, 8, 10mm Dia	180	PCB Pin	
	<b>TL1240</b>	Caps Available / LED Illuminated <b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	6.0mm x 6.0mm	160	PCB Pin	

E-SWITCH®	General Ratings	Electrical Ratings	Travel	Dimensions	Operating Force (gf)	Mounting Options	Ingress Protection	
	<b>TL1250</b>	<b>Life Cycles:</b> 50,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.2mm	7.0mm x 8.3mm	120, 180, 280	PCB Pin	×
	<b>TL1260</b>	<b>Caps Available / LED Illuminated</b> <b>Life Cycles:</b> 50,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.2mm	6.8mm x 7.0mm	160	PCB Pin	×
	<b>TL1265</b>	<b>Caps Available / LED Illuminated</b> <b>Life Cycles:</b> 500,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.2mm	6.8mm x 7.0mm	160	PCB Pin	×
	<b>TL1275</b>	<b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -25°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	19mm	350	PMT	×
	<b>TL2243</b>	<b>Double Stacked Low Profile</b> <b>Life Cycles:</b> 30,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	7.3mm x 9.1mm	180	PCB Pin	×
	<b>TL3145</b>	<b>Multiple Actuator Heights</b> <b>Life Cycles:</b> up to 3,000,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max.	50mA, 12VDC	0.5mm	6.5mm x 6.5mm	180gf 260gf 350gf	Surface Mount	×
	<b>TL3200</b>	<b>Single or Dual LED Illumination</b> <b>Life Cycles:</b> 30,000 <b>Operating Temp:</b> -25°C to 85°C <b>Contact Resistance:</b> 500mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	6.8mm x 4.5mm	160	SMT (Gull Wing)	×
	<b>TL3210</b>	<b>LED Illuminated</b> <b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 500mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.2mm	5.6mm x 3.4mm	160	SMT (Gull Wing)	×
	<b>TL3215</b>	<b>LED Illuminated</b> <b>Life Cycles:</b> 1,000,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	4.9mm x 4.9mm	160	SMT (Gull Wing)	×
	<b>TL3240</b>	<b>LED Illuminated / Caps Available</b> <b>Life Cycles:</b> up to 200,000 <b>Operating Temp:</b> -25°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.2mm	6.1mm x 6.1mm	100, 160, 260	SMT (Gull Wing)	×
	<b>TL3253</b>	<b>LED Illuminated</b> <b>Life Cycles:</b> up to 500,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	8.4mm x 10.55mm	160	Right Angle PCB Pin	×

Specifications subject to change without notice

 E-SWITCH®		General Ratings	Electrical Ratings	Travel	Dimensions	Operating Force (gf)	Mounting Options	Ingress Protection
	TL3265	Multiple Actuator Styles Life Cycles: up to 500,000 Operating Temp: -20°C to 70°C Contact Resistance: 100mΩ Max. Insulation Resistance: 100MΩ Min. @ 500VDC	5mA, 12VDC	0.2mm	6.8mm x 7.0mm	160	SMT	×
	TL3275	<b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 500mΩ Max. (Initial) <b>Insulation Resistance:</b> 100MΩ Min. @ 100VDC.	50mA, 12VDC	0.20mm ± 0.10mm	6.4mm x 3.4mm	160gf ± 50gf	SMT	×
	TL3300	Multiple Actuator Styles Life Cycles: up to 200,000 Operating Temp: -25°C to 70°C Contact Resistance: 100mΩ Max. Insulation Resistance: 100MΩ Min.	50mA, 12VDC	0.35mm	12mm x 12mm	160, 260, 320, 520	SMT (Gull Wing)	×
	TL3301	Caps Available / Multiple Actuator Styles <b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	6.0mm x 6.0mm	100, 160, 260	SMT (Gull Wing)	×
	TL3302	Multiple Actuator Styles Life Cycles: 20,000 - 50,000 Operating Temp: -20°C to 70°C Contact Resistance: 100mΩ Max. Insulation Resistance: 100MΩ Min.	50mA, 12VDC	0.25mm	3.5mm x 6.0mm	130, 180, 260	SMT (Gull Wing)	×
	TL3303	Multiple Actuator Styles <b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	6.0mm x 6.0mm	100, 160, 260	SMT (Gull Wing)	×
	TL3305	Life Cycles: up to 500,000 Operating Temp: -20°C to 70°C Contact Resistance: 100mΩ Max. Insulation Resistance: 100MΩ Min.	50mA, 12VDC	0.20mm	4.5mm x 4.5mm	160, 260	SMT (Gull Wing)	×
	TL3312	Life Cycles: 500,000(160gf), 50,000 (235 gf) Operating Temp: -40°C to 85°C Contact Resistance: 100mΩ Max. Insulation Resistance: 100MΩ Min.	50mA, 12VDC	0.15mm	3.7mm x 3.7mm	160, 235	SMT (Gull Wing)	×
	TL3313	<b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 50mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	4.8mm x 4.8mm	100, 160, 250	SMT (Gull Wing)	×
	TL3315	<b>Life Cycles:</b> 1,000,000 (100gf), 500,000 (160gf), 200,000 (250gf) <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 200mΩ Max. <b>Insulation Resistance:</b> 50MΩ Min.	50mA, 12VDC	0.2mm	4.5mm x 4.5mm	4.5mm x 4.5mm	SMT (Gull Wing)	×
	TL3330	<b>Life Cycles:</b> 50,000 (130gf), 30,000 (260gf) <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	6.9mm x 3.3mm	130, 260	Right Angle SMT (Gull Wing)	×




 <b>E-SWITCH®</b>		General Ratings	Electrical Ratings	Travel	Dimensions	Operating Force (gf)	Mounting Options	Ingress Protection
	<b>TL3336</b>	<b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. (Initial) <b>Insulation Resistance:</b> 100mΩ Max. (Initial)	12VDC, 50mA	0.35mm	7mm x 7.10mm	160gf ± 50gf	Right-Angle SMT	IP67
	<b>TL3340</b>	<b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -35°C to 85°C <b>Contact Resistance:</b> 500mΩ (Initial Max.) <b>Insulation Resistance:</b> 100MΩ (Min. @ 100V)	50mA @ 12VDC	0.20 ± 0.10mm	4mm x 3.3mm	160gf ± 50gf; 130gf ± 30g	SMT (Gull Wing)	✗
	<b>TL3342</b>	<b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 20mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	5.2mm x 5.2mm	160, 250	SMT (Gull Wing)	✗
	<b>TL3360</b>	<b>Life Cycles:</b> 200,000 <b>Operating Temp:</b> -25°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.15mm	6.5mm x 6mm	185, 260	Right Angle SMT (Gull Wing)	✗
	<b>TL3365</b>	<b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.20mm	4.2mm x 3.2mm	180	SMT (Gull Wing)	✗
	<b>TL3701</b>	<b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 500mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.15mm	3.0mm x 2.6mm	100, 160	SMT (Gull Wing)	✗
	<b>TL3780</b>	<b>Life Cycles:</b> up to 500,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 500mΩ Max. <b>Insulation Resistance:</b> 50MΩ Min	50mA, 12VDC	0.13mm	2.0mm x 3.0mm	100, 160, 240, 330	SMT (Gull Wing)	✗
	<b>TL3901</b>	<b>Life Cycles:</b> 50,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 500mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min	50mA, 12VDC	0.3mm	5.4mm x 5.0mm	180	Right Angle Edge (Gull Wing)	✗
	<b>TL4100</b>	<b>Life Cycles:</b> 1,000,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.15mm	3.5mm x 6.2mm	120, 240	Right Angle Edge (Gull Wing)	✗
	<b>TL4105</b>	<b>Life Cycles:</b> 200,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 1Ω Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.15mm	2.9mm x 4.8mm	160	Right Angle Edge (Gullwing)	✗
	<b>TL4115</b>	<b>Life Cycles:</b> 600,000 <b>Operating Temp:</b> -30°C to 85°C <b>Contact Resistance:</b> 500mΩ Max. (Initial) <b>Insulation Resistance:</b> 100MΩ Min. at 100VDC"	12VDC, 50mA	0.15mm	2.6mm x 4.5mm	160gf ± 50gf 220gf ± 70gf	SMT Right-Angle-Edge	✗




E-SWITCH®		General Ratings	Electrical Ratings	Travel	Dimensions	Operating Force (gf)	Mounting Options	Ingress Protection
	<b>TL4110</b>	<p><b>Life Cycles:</b> 300,000  <b>Operating Temp:</b> -40°C to 85°C  <b>Contact Resistance:</b> 500mΩ Max.  <b>Insulation Resistance:</b> 50MΩ Min.</p>	20mA, 15VDC	0.13mm	2mm x 2.8mm	160	SMT	×
	<b>TL52</b>	<p><b>IP67 Rated</b>  <b>Life Cycles:</b> 100,000  <b>Operating Temp:</b> -25°C to 85°C  <b>Contact Resistance:</b> 100mΩ Max.  <b>Insulation Resistance:</b> 100MΩ Min.</p>	50mA, 12VDC	0.3mm	8.0mm x 8.0mm	160, 260	PCB Pin	IP67
	<b>TL58</b>	<p><b>Multiple Actuator Styles</b>  <b>Life Cycles:</b> 100,000  <b>Operating Temp:</b> -20°C to 70°C  <b>Contact Resistance:</b> 100mΩ Max.  <b>Insulation Resistance:</b> 100MΩ Min.</p>	50mA, 12VDC	0.25mm	6.2mm x 6.2mm	100, 160, 260	Right Angle PCB Pin	×
	<b>TL59</b>	<p><b>Multiple Actuator Styles</b>  <b>Life Cycles:</b> 100,000  <b>Operating Temp:</b> -20°C to 70°C  <b>Contact Resistance:</b> 100mΩ Max.  <b>Insulation Resistance:</b> 100MΩ Min.</p>	50mA, 12VDC	0.25mm	6.2mm x 6.2mm	100, 160, 260	PCB Pin	×
	<b>TL6100</b>	<p><b>Multiple Actuator Styles</b>  <b>Life Cycles:</b> up to 1,000,000  <b>Operating Temp:</b> -40°C to 85°C  <b>Contact Resistance:</b> 100mΩ Max.  <b>Insulation Resistance:</b> 100MΩ Min.</p>	50mA, 12VDC	0.5mm	7.4mm x 7.4mm	130, 160, 300, 500	PCB Pin	Process Sealed
	<b>TL6105</b>	<p><b>Multiple Actuator Styles</b>  <b>Life Cycles:</b> up to 1,000,000  <b>Operating Temp:</b> -40°C to 85°C  <b>Contact Resistance:</b> 100mΩ Max.  <b>Insulation Resistance:</b> 100MΩ Min.</p>	50mA, 12VDC	0.5mm	7.4mm x 7.4mm	130, 160, 300, 500	PCB Pin w/ Earth ground terminal	×
	<b>TL6110</b>	<p><b>Multiple Actuator Styles</b>  <b>Life Cycles:</b> up to 1,000,000  <b>Operating Temp:</b> -40°C to 85°C  <b>Contact Resistance:</b> 100mΩ Max.  <b>Insulation Resistance:</b> 100MΩ Min.</p>	50mA, 12VDC	0.5mm	5.8mm x 8.3mm	130, 160, 300, 500	Right Angle PCB Pin	Process Sealed
	<b>TL6120</b>	<p><b>Multiple Actuator Styles</b>  <b>Life Cycles:</b> up to 1,000,000  <b>Operating Temp:</b> -40°C to 85°C  <b>Contact Resistance:</b> 100mΩ Max.  <b>Insulation Resistance:</b> 100MΩ Min.</p>	50mA, 12VDC	0.5mm	7.4mm x 7.4mm	130, 160, 300, 500	SMT (Gull Wing)	Process Sealed
	<b>TL6150</b>	<p><b>Life Cycles:</b> Up to 5,000,000  <b>Operating Temp:</b> -40°C to 85°C  <b>Contact Resistance:</b> 100mΩ Max. (Initial)  <b>Insulation Resistance:</b> 10MΩ Min. at 100VDC</p>	50mA, 32VDC	0.3mm; 160gf 0.35mm; 200gf 0.5mm; 350gf	6.2mm x 6.2mm	160gf 200gf 350gf	SMT Gull Wing or J-Lead	IP67
	<b>TL6155</b>	<p><b>Life Cycles:</b> 300,000  <b>Operating Temp:</b> -40°C to 85°C  <b>Contact Resistance:</b> 100mΩ Max. (Initial)  <b>Insulation Resistance:</b> 10MΩ Min. at 100VDC</p>	50mA, 32VDC	0.5mm	6.4mm x 6.55mm	350gf ± 100gf	Right-Angle SMT	IP67

Specifications subject to change without notice



E-SWITCH®		General Ratings	Electrical Ratings	Travel	Dimensions	Operating Force (gf)	Mounting Options	Ingress Protection
	TL6170	<b>Life Cycles:</b> 300,000 Cycles <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. (Initial) <b>Insulation Resistance:</b> 100MΩ Min. at 100VDC	50mA, 12VDC	0.40mm ± 0.20mm	6.3mm x 6.3mm	250gf ± 80gf 180gf ± 80gf	SMT Gull Wing	IP67
	TL6190	<b>Life Cycles:</b> 100,000 <b>Operating Temp (Switch):</b> -40°C to 105°C <b>Operating Temp (Cap):</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.5mm	12.0mm x 11.5mm	220	Right Angle PCB Pin	Process Sealed
	TL6200	<b>Life Cycles:</b> 10,000,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 30mΩ Max. <b>Insulation Resistance:</b> 10MΩ Min.	50mA, 24VDC	1.0mm	10.10mm x 10.10mm	300	SMT (Gull Wing) PCB Pin	IP67
	TL6210	<b>LED Illuminated</b> <b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 500mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.45mm	6.2mm x 4.6mm	200	SMT (Gull Wing)	IP67
	TL6215	<b>Caps Available / LED Illuminated</b> <b>Life Cycles:</b> 500,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.45mm	7.7mm x 6.37mm	200, 450	Vertical or Right Angle PCB Pin	IP67
	TL6275	<b>LED Illuminated</b> <b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -25°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.25mm	8mm x 8mm	350	PCB Pin	Process Sealed
	TL6300	<b>Life Cycles:</b> 10,000,000 <b>Operating Temp:</b> -40°C to 90°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.3mm	12mm x 12mm	260	PCB Pin	IP67
	TL6330	<b>Life Cycles:</b> 200,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 1GΩ Min.	50mA, 32VDC	0.25mm	2.8mm x 4.6mm	200	SMT	IP67
	TL6340	<b>Life Cycles:</b> 200,000 <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max.	20mA, 12VDC	0.2mm	2.9mm x 3.90mm x 2mm	160	Right Angle Surface Mount	IP67


Specifications subject to change without notice



E-SWITCH®		General Ratings	Electrical Ratings	Travel	Dimensions	Operating Force (gf)	Mounting Options	Ingress Protection
	<b>TL6400</b>	<b>Life Cycles:</b> 30 - 50,000 Cycles <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. (Initial) <b>Insulation Resistance:</b> 100MΩ Min. at 100VDC	50mA, 12VDC	0.15mm ± 0.10mm	6mm x 3.4mm	160gf ± 50gf 50,000 cycles 260gf ± 70gf 30,000 cycles	SMT (J-Bend)	IP67
	<b>TL6700</b>	<b>Life Cycles:</b> 500,000 (160gf), 100,000 (260gf) <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max. <b>Insulation Resistance:</b> 100MΩ Min.	50mA, 12VDC	0.35mm	6.9mm x 6.2mm	160, 260	SMT (Gull Wing J-Bend)	IP67
	<b>TL6800</b>	<b>Life Cycles:</b> 500,000 & 1,000,000 <b>Operating Temp:</b> -40°C to 90°C <b>Contact Resistance:</b> 100mΩ Max. (Initial) <b>Insulation Resistance:</b> 100MΩ Min. at 100VDC	50mA, 12VDC	0.25mm +0.15mm	6.2mm x 6.3mm	160gf 1,000,000 260gf 500,000	SMT (J-Bend)	IP67
	<b>TL9100</b>	<b>Life Cycles:</b> 100,000(200gf); 30,000(350gf) <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 100mΩ Max <b>Insulation Resistance:</b> 100MΩ @500 VDC.	50mA, 12VDC	1.3mm	6.0mm x 6.0mm	200, 350	SMT (J-Bend)	✗
	<b>TL9210</b>	<b>Life Cycles:</b> 100,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ initial <b>Insulation Resistance:</b> 100MΩ Min.@100VDC	50mA, 12VDC	1.3mm	6.0mm x 6.0mm	200	SMT (J-Bend)	✗
	<b>TL9320</b>	<b>Life Cycles:</b> 500,000 <b>Operating Temp:</b> -20°C to 70°C <b>Contact Resistance:</b> 100mΩ Max.	50mA, 16VDC	0.9mm	8.4mm x 8.4mm x 3.95mm	400	Surface Mount	IP67

Specifications subject to change without notice

# SNAP ACTION SWITCHES

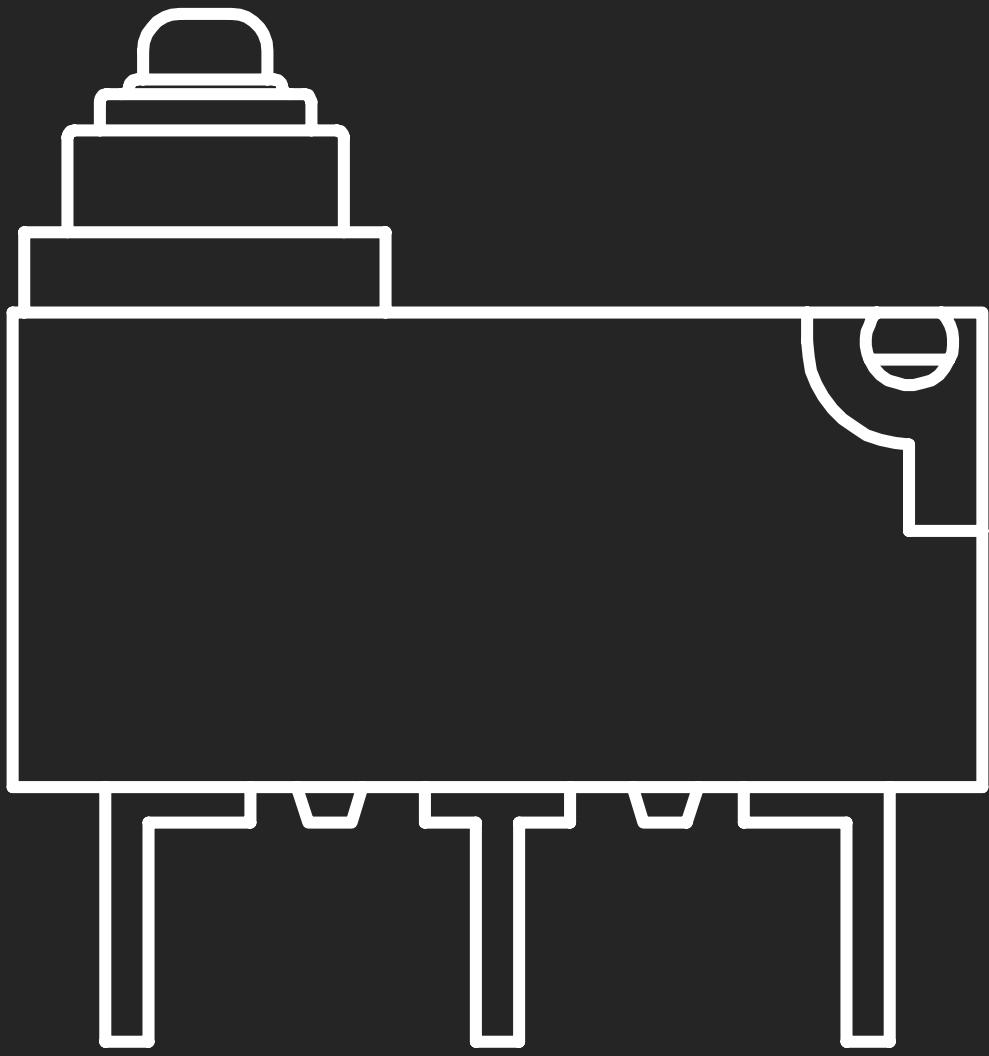

Snap Action switches, also called microswitches, are switch devices that can open and/or close an electrical circuit at a rapid speed. Triggered by an external force, either human or physical object, which is then applied to an actuator that requires very little pressure to operate. Snap Action switches offer multiple actuator options, such as pin plunger, lever, roller or simulated roller lever. Reliability and long operating life make snap action switches ideal for counter top appliances, timer controls, vending machines, gaming devices, power tools and industrial controls.




# SNAP ACTION SWITCHES



E-SWITCH®		General Ratings	Electrical Ratings	Functions	Operating Force	Actuator Options	Terminal Options	Body Options
	LS	<b>Electrical Life:</b> 50,000 Cycles <b>Mechanical Life:</b> 1,000,000 Cycles <b>Operating Temp:</b> -25°C to 85°C <b>Contact Resistance:</b> 100mΩ Max.	<b>Silver</b> cURus, 15A, 125/250VAC  <b>Gold:</b> 0.4VA, 20V (AC or DC)	SPST N.O. SPST N.C. SPDT	25-250 (*Depending upon actuator)	Pin Plunger Lever Roller Simulated Roller	Quick Connect Right Angle PCB Pin Left Angle PCB Pin Solder Lug	<b>Width:</b> 27.9mm <b>Height:</b> 15.9mm <b>Depth:</b> 10.3mm
	MS	<b>Electrical Life:</b> 50,000 Cycles <b>Mechanical Life:</b> 1,000,000 Cycles <b>Operating Temp:</b> -25°C to 85°C <b>Contact Resistance:</b> 100mΩ Max.	<b>Silver</b> cURus: 5A, 125/250VAC  <b>Gold:</b> 0.4VA, 20V (AC or DC)	SPST N.O. SPDT	10-295 (*Depending upon actuator)	Pin Plunger Lever Roller Simulated Roller Custom	Quick Connect PCB Pin Right Angle PCB Pin Left Angle PCB Pin Solder Lug	<b>Width:</b> 19.8mm <b>Height:</b> 10.6mm <b>Depth:</b> 6.4mm
	SS	<b>Electrical Life:</b> 10,000 Cycles <b>Mechanical Life:</b> 1,000,000 Cycles <b>Operating Temp:</b> -25°C to 75°C <b>Contact Resistance:</b> 100mΩ Max.	<b>Silver</b> cURus: 3A, 125VAC 1.5A, 250VAC 0.1A, 5VDC  <b>Gold:</b> 0.4VA, 20V (AC or DC)	SPDT	15-130 (*Depending upon actuator)	Pin Plunger Lever Simulated Roller	PCB Pin PCB Retention Right Angle PCB Pin Left Angle PCB Pin Solder Lug	<b>Width:</b> 12.7mm <b>Height:</b> 6.5mm <b>Depth:</b> 5.75mm
	TS	<b>Electrical Life:</b> 50,000 Cycles <b>Mechanical Life:</b> 100,000 Cycles <b>Operating Temp:</b> -25°C to 85°C <b>Contact Resistance:</b> 300mΩ Max.	300mA, 6VDC	SPDT	20	Lever	Vertical PCB Pin Right Angle PCB Pin Short Left Angle PCB Pin Short Right Angle PCB Pin Long Left Angle PCB Pin Long	<b>Width:</b> 8.2mm <b>Height:</b> 6.6mm <b>Depth:</b> 2.7mm
	TS2	<b>Electrical Life:</b> 3,000,000 Cycles <b>Mechanical Life:</b> 3,000,000 Cycles <b>Operating Temp:</b> -25°C to 85°C <b>Contact Resistance:</b> 300mΩ Max.	100mA, 125VAC 100mA, 48VDC	SPST	70	Pin Plunger	SMT Terminals	<b>Width:</b> 8.6mm <b>Height:</b> 3.0mm <b>Depth:</b> 4.8mm
	WS	<b>Electrical Life:</b> 10,000 Cycles <b>Mechanical Life:</b> 1,000,000 Cycles <b>Operating Temp:</b> -25°C to 85°C <b>Contact Resistance:</b> 100mΩ Max. <b>Ingress Protection:</b> IP67	0.5A, 42VDC 1A, 24VDC 2A, 12VDC 3A, 125/250VAC	SPDT	50-70 (*Depending upon actuator)	Pin Plunger Lever Simulated Roller	PCB Pins Soldering Lugs	<b>Width:</b> 13.3mm <b>Height:</b> 7.0mm <b>Depth:</b> 5.3mm
	WS1	<b>Electrical Life:</b> 100,000 Cycles MIN. <b>Mechanical Life:</b> 500,000 Cycles MIN <b>Operating Temp:</b> -40°C to 85°C <b>Contact Resistance:</b> 50mΩ Max. <b>Ingress Protection:</b> IP67	01 = 0.1A @ 48VDC 0.1A @ 125VAC, 250VAC 3 = 3A @ 12VDC 3A @ 125VAC, 250VAC	SPDT	130 gf MAX.	Pin Plunger	Solder Lug Wire Leads	<b>Width:</b> 14.7mm <b>Height:</b> 6.3mm <b>Depth:</b> 5.4mm
	WS2	<b>Electrical Life:</b> 100,000 Cycles MIN. <b>Mechanical Life:</b> 500,000 Cycles MIN <b>Operating Temp:</b> -25°C to 85°C <b>Contact Resistance:</b> 50mΩ Max. <b>Ingress Protection:</b> IP67	2A @ 30VDC 2A @ 250VAC	SPDT	130 gf MAX.	Pin Plunger	Solder Lug Quick Connect PCB Pin	<b>Width:</b> 19.8mm <b>Height:</b> 10mm <b>Depth:</b> 6.3mm

Specifications subject to change without notice

# ROCKER SWITCHES

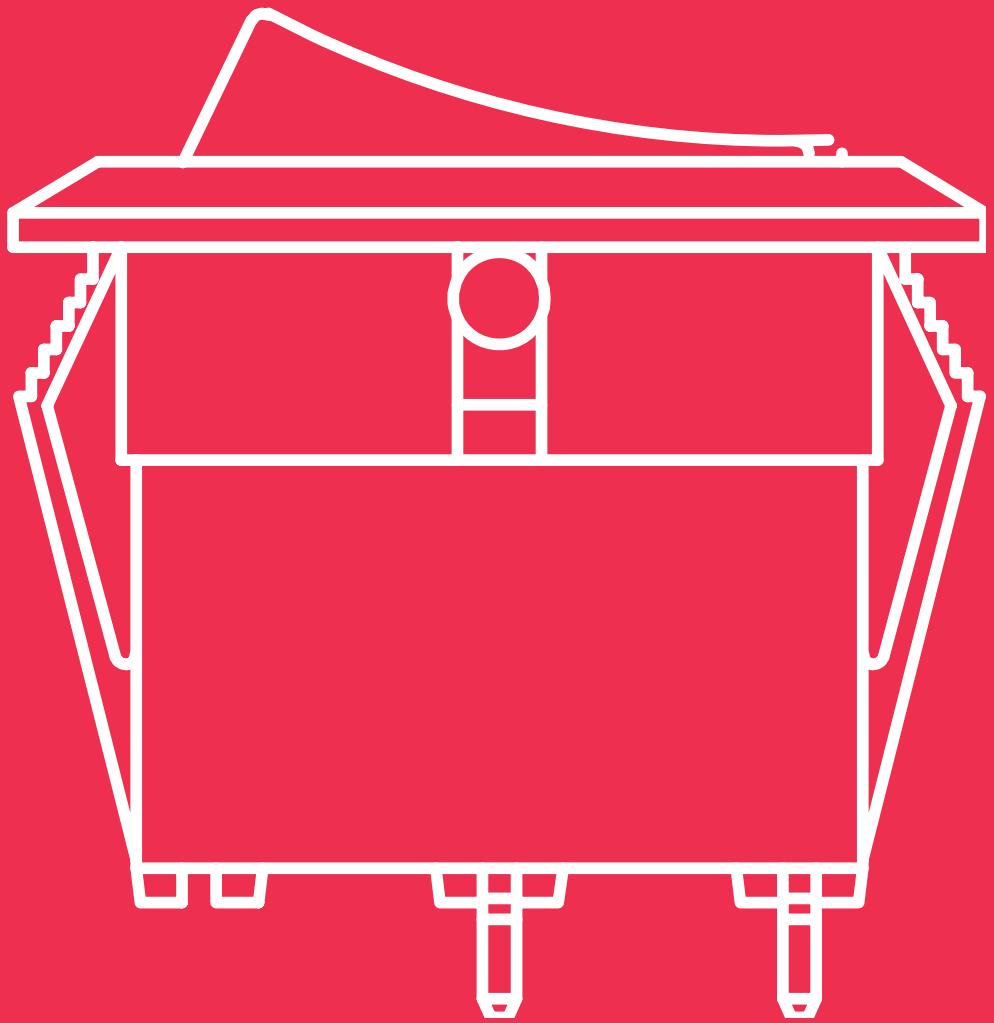

Rocker switches are commonly used as an on/off switch that rocks (rather than trips) when pressed, meaning the rocker opens or closes the circuit. This means that one side of the Rocker switch is raised while the other side is depressed, much like a seesaw or rocking horse. E-Switch offers a range of Rocker switches, from miniature size with low current ratings to industrial use switches with high power and horsepower ratings. Several Rocker switches provide an IP rating of IP67, IP55 or IP54 depending the switch series. Panel mount installation is most common, however, a few E-Switch Rocker series provide PC mount options. Additional options include non-illuminated or illuminated, plus actuator shapes such as rectangle, round, oval and paddle style actuators.





E-SWITCH®	Electrical Ratings	Poles / Functions	Actuator Options	Mounting Options	Terminal Options	Ingress Protection	
	<b>300</b>	<b>Silver:</b> 5A, 120VAC [cURus] 5A, 28VDC 2A, 250VAC [cURus]  <b>Gold:</b> 0.4VA, 20V (AC or DC)	<b>1, 2, 3, or 4 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On)  <b>2 Pole:</b> On-On-On On-On-(On) (On)-On-(On)  <b>4 Pole:</b> On-On-On	Paddle Rocker	<b>Panel Mount:</b> Quick Connect Vertical Solder Lug  <b>PC Mount:</b> Horizontal Right Angle Horizontal Right Angle with Bracket Vertical Vertical Right Angle Vertical with Bracket	PCB Pin Quick Connect Solder Lug	
	<b>300A</b>	<b>Silver:</b> 5A, 120VAC [cURus] 5A, 28VDC 2A, 250VAC [cURus]  <b>Gold:</b> 0.4VA, 20V (AC or DC)	<b>1 or 2 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On)	Paddle Rocker	<b>Panel Mount:</b> Quick Connect Vertical Solder Lug  <b>PC Mount:</b> Horizontal Right Angle Horizontal Right Angle with Bracket Vertical Vertical Right Angle Vertical with Bracket	PCB Pin Quick Connect Solder Lug	IP67
	<b>400</b>	<b>Silver:</b> 3A, 120VAC [cURus] 3A, 28VDC 1A, 250VAC [cURus]  <b>Gold:</b> 0.4VA, 20V (AC or DC)	<b>1 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On)  <b>2 Pole:</b> On-On On-(On) On-Off-On On-(On)	Rocker	<b>Panel Mount:</b> Vertical Solder Lug  <b>PC Mount:</b> Horizontal Right Angle Horizontal Right Angle with Bracket Vertical Vertical Right Angle Vertical Right Angle with Bracket Vertical with Bracket	PCB Pin Solder Lug	
	<b>400A</b>	<b>Silver:</b> 3A, 120VAC [cURus] 3A, 28VDC 1A, 250VAC [cURus]  <b>Gold:</b> 0.4VA, 20V (AC or DC)	<b>1 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On)  <b>2 Pole:</b> On-On On-(On) On-Off-On On-(On)	Rocker	<b>Panel Mount:</b> Vertical Solder Lug  <b>PC Mount:</b> Horizontal Right Angle Horizontal Right Angle with Bracket Vertical Vertical Right Angle Vertical Right Angle with Bracket Vertical with Bracket	PCB Pin Solder Lug	IP67
	<b>400B</b>	<b>Silver:</b> 3A, 120VAC [cURus] 1A, 250VAC [cURus]	<b>1 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On)	Rocker	<b>PC Mount:</b> Surface Mount	SMT	IP67
	<b>400U</b>	<b>Gold:</b> 0.4VA@ 24V AC or DC	<b>2 Pole:</b> On-None-On	Rocker Lever	<b>PC Mount:</b> Vertical Right Angle, PC thru-hole Right Angle, PC thru-hole PC thru-hole	PCB Pin	

Specifications subject to change without notice



E-SWITCH®		Electrical Ratings	Poles / Functions	Panel Cutout	Actuator Options	Illumination Options	Ingress Protection	
	<b>R1966</b>	15A, 125VAC T65 [cURus]	<b>1 Pole:</b> On-Off On-Off-On Off-(On) On-Off-(On)	On-On On-(Off) On-(On) (On)-Off-(On)	13mm x 19.2mm	Curved	Full	<b>X</b>
	<b>R1973</b>	9A, 125VAC T65 [cURus]	<b>1 Pole:</b> On-Off  <b>2 Pole:</b> On-Off		13mm x 19.2mm	Curved	Full	<b>X</b>
	<b>R4</b>	20A, 125VAC T65 [cURus]	<b>1 Pole:</b> On-Off On-Off-On Off-(On) On-(Off)	On-On On-(On) (On)-Off-(On)	11mm x 30mm	Curved	Full Dott	<b>X</b>
	<b>R5</b>	20A, 125VAC T65 [cURus]	<b>2 Pole:</b> On-Off On-Off-On Off-(On) On-(Off)	On-On On-(On) (On)-Off-(On) On-Off-(On)	22mm x 30mm	Curved	Full	<b>X</b>
	<b>R6</b>	10A, 125VAC T65 [cURus]	<b>1 Pole:</b> On-Off	(On)-Off	6.65mm x 19.2mm	Curved	<b>X</b>	<b>X</b>
	<b>R7</b>	16(8)A, 125/250VAC [cURus]	<b>1 or 2 Pole:</b> On-Off (On)-Off On-(Off) On-Off-On	On-On (On)-On (On)-Off-On (On)-Off-(On)	21.1mm x 37mm	Hard PC or TPR	Multiple Lens Options	IP67
	<b>RA1</b>	16A, 125VAC 1/3HP T105 [cURus]	<b>1 Pole:</b> Off-On On-(On) Off-(On) On-Off-On	On-(Off) On-Off-(On) On-On (On)-Off-(On)	13mm x 19mm	Bi-Color Curved Custom	Full Signal Light	IP54 with cap
	<b>RA4</b>	16A, 125VAC 1/3HP T105 [cURus]	<b>1 or 2 Pole:</b> Off-On Off-(On) On-(Off)	On-On On-Off-On On-(On)	22mm x 19.2mm	Curved Paddle	Full	IP54 with cap
	<b>RA8</b>	16A, 125VAC 1/3HP T105 [cURus]	<b>1 Pole:</b> Off-On  <b>2 Pole:</b> Off-On		13mm x 19mm	Bi-color Curved	Full Signal Light	IP54 with cap

Specifications subject to change without notice



E-SWITCH®		Electrical Ratings	Poles / Functions	Panel Cutout	Actuator Options	Illumination Options	Ingress Protection	
	RB1	20A, 125VAC 1/4HP T65 [cURus]	<b>1 Pole:</b> Off-On On-(On) Off-(On) On-Off-On	On-(Off) On-Off-(On) On-On (On)-Off-(On)	11mm x 30mm	Curved Flat	Dot Full Signal Light	IP54 with cap
	RB2	20A, 125VAC 1/4HP T65 [cURus]	<b>1 or 2 Pole:</b> Off-On On-Off-On (On)-Off-(On)	On-On On-Off-(On)	22mm x 30mm	Curved Flat	Dot Full Signal Light	IP54 with cap
	RB3	A - 16(8)A, 125/250VAC, T55, IP67 B - 20(8)A, 125/250VAC, T55, IP67 C - 25(8)A, 125/250VAC, T55, IP67 D - 16A, 6-48VDC, T55, IP67 E - 20A, 6-36VDC, T55, IP67 1 - 16(8)A, 125/250VAC, T125/55 2 - 20(8)A, 125/250VAC, T125/55 4 - 16A, 6-48VDC, 40T125/55 5 - 20A, 6-36VDC, 40T125/55	<b>1 Pole:</b> On-Off On-Off-On (On)-On (On)-Off-On	On-On (On)-Off (On)-Off-(On)	13.8mm x 30.2mm	Flat Black or White	Single or Double LED	IP67
	RB5	A - 16(8)A, 125/250VAC, T55, IP67 B - 20(8)A, 125/250VAC, T55, IP67 C - 25(8)A, 125/250VAC, T55, IP67 D - 16A, 6-48VDC, T55, IP67 E - 20A, 6-36VDC, T55, IP67 1 - 16(8)A, 125/250VAC, T125/55 2 - 20(8)A, 125/250VAC, T125/55 4 - 16A, 6-48VDC, 40T125/55 5 - 20A, 6-36VDC, 40T125/55	<b>2 Pole:</b> On-Off On-Off-On (On)-On (On)-Off-On	On-On (On)-Off (On)-Off-(On)	22mm x 30.2mm	Flat Black or White	Single or Double LED	IP67
	RBW2	16(16)A, 125VAC 5E4 T85 [cURus]	<b>2 Pole:</b> Off-On	*On-On	22mm x 30mm	Curved	Full	IP66
	RD1	16A, 125VAC 1/3HP T105 [cURus]	<b>1 Pole:</b> Off-On		6.8mm x 19.2mm	Curved	✗	✗
	RSC	20A, 125VAC 1/4HP T105 [cURus]	<b>1 Pole:</b> Off-On Off-(On)	On-On	28.6mm x 13.9mm 27.2mm x 12.1mm 27.2mm x 13.9mm 28.6mm x 12.1mm	Bi-Color Curved Flat	Full Signal Light	N/A
	RVW	20A, 125VAC [cURus UL508] <b>Momentary Switches:</b> 1.5HP, 220-240VAC [cURus UL508]	20A, 125VAC [cURus UL508] <b>Momentary Switches:</b> 1.5HP, 220-240VAC [cURus UL508]		21mm x 36.8mm	Curved	✗	IP54
	WB2	<b>Maintained Switches:</b> 20A, 125/250VAC T65/T85 [cURus] <b>Momentary Switches:</b> 20A, 125/250VAC T65/T85 [cURus]	<b>Maintained Switches:</b> 20A, 125/250VAC T65/T85 [cURus] <b>Momentary Switches:</b> 20A, 125/250VAC T65/T85 [cURus]		22mm x 30mm	Curved	✗	IP55



E-SWITCH®		Electrical Ratings	Poles / Functions	Panel Cutout	Actuator Options	Illumination Options	Ingress Protection	
	<b>RE1</b>	16A, 125VAC 1/3HP T105 [cURus]	<b>1 Pole:</b> Off-On On-On	On-Off-On	13.5mm x 23.3mm (Oval)	Curved	Full	<b>X</b>
	<b>RR1</b>	16A, 125VAC 1/3HP T105 [cURus]	<b>1 Pole:</b> Off-On Off-(On) On-(Off) On-Off-(On)	On-On On-Off-On On-(On)	20mm	Curved	Dot Full Signal Light	IP54 with cap
	<b>RR3112</b>	16A, 125VAC T65 [cURus] 10A, 250VAC T65 [cURus]	<b>1 Pole:</b> On-Off On-Off-On	On-On Off-(On)	20.2mm	Curved	Full	<b>X</b>
	<b>RR3130</b>	10A, 125VAC T65 [cURus] 6A, 250VAC T65 [cURus]	<b>1 Pole:</b> On-Off <b>2 Pole:</b> On-On	On-On	18.2mm	Curved	<b>X</b>	<b>X</b>
	<b>RR3402</b>	6A, 125VAC [cURus] 3A, 250VAC [cURus]	<b>1 Pole:</b> On-Off On-Off-On	On-On	15mm	Paddle	<b>X</b>	<b>X</b>


Specifications subject to change without notice



 <b>E-SWITCH®</b>		Electrical Ratings	Poles / Functions	Panel Cutout	Actuator Options	Illumination Options	Ingress Protection
	<b>RR5</b>	20A, 125VAC T65 [cURus] 12A, 250VAC T65 [cURus]	<b>1 Pole:</b> Off-On Off-(On)	20mm	Curved	×	×
	<b>RR8</b>	16A, 125VAC 1/3HP T105 [cURus] 10A, 250VAC 1/3HP T105 [cURus]	<b>1 Pole:</b> Off-On <b>2 Pole:</b> Off-On On-Off-On	20mm	Curved	Full	×
	<b>RRA</b>	15A, 125VAC 1/3HP T105 [cURus] 10A, 250VAC 1/3HP T105 [cURus]	<b>1 Pole:</b> Off-On On-Off-On <b>2 Pole:</b> Off-On On-Off-On	22mm	Curved	Full	Capped to provide protection from the elements at an <b>IP54</b> ingress protection rating
	<b>RRG3</b>	16A, 125VAC 1/3HP T105 [cURus] 10A, 250VAC 1/3HP T105 [cURus]	<b>1 Pole:</b> Off-On Off-(On) On-(Off) On-Off-(On)	20mm	Curved	×	×
	<b>RRGA</b>	16A, 125VAC 1/3HP T105 [cURus] 10A, 250VAC 1/3HP T105 [cURus]	<b>1 Pole:</b> Off-On Off-(On) On-(Off) On-Off-(On)	22mm	Curved	×	×

Specifications subject to change without notice

# TOGGLE SWITCHES

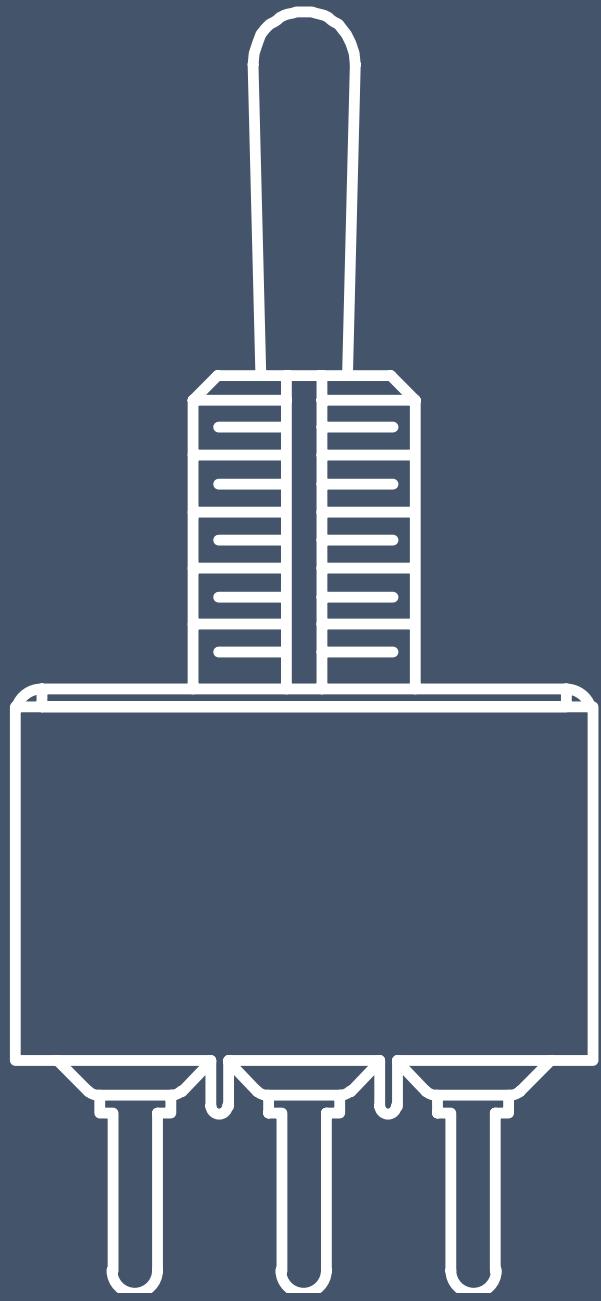

The Toggle switch is characterized by the presence of a manually operated handle or lever which controls the flow of electrical current from power supply to device, such as a household appliance. E-Switch offers Toggle switches with multiple options such as actuators, bushings and terminals, as well as low to high current ratings and some with horsepower ratings for industrial applications. Smaller size toggles are often used in equipment for telecommunications, networking, instrumentation and medical devices. High power Toggles are used in industrial control panels, motor-sports vehicles, commercial appliances, restaurant equipment and recreational vehicles.




E-SWITCH®		General Ratings	Electrical Ratings	Poles / Functions	Actuator Options	Bushing Options	Terminal Options	Ingress Protection
	<b>100</b>	<b>Electrical Life:</b> 6,000 Cycles <b>Mechanical Life:</b> 40,000 Cycles <b>Operating Temp:</b> -30°C to 85°C <b>Contact Resistance:</b> 10mΩ Max.	<b>Silver:</b> 5A, 120VAC [cURus] 5A, 28VDC 2A, 250VAC [cURus]  <b>Gold:</b> 0.4VA, 20V Max. (AC or DC)	<b>1 or 3 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On)  <b>2 or 4 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On) On-On-On On-On-(On) (On)-On-(On)	Flat Locking Metal Plastic	High Torque Non-Threaded Threaded Splash Proof	Quick Connect  Right Angle PCB Pin  Solder Lug  Vertical PCB Pin  Wire Wrap	<b>×</b>
	<b>100A</b>	<b>Electrical Life:</b> 6,000 Cycles <b>Mechanical Life:</b> 30,000 Cycles <b>Operating Temp:</b> -30°C to 85°C <b>Contact Resistance:</b> 10mΩ Max.	<b>Silver:</b> 5A, 120VAC [cURus] 5A, 28VDC 2A, 250VAC [cURus]  <b>Gold:</b> 0.4VA, 20V Max. (AC or DC)	<b>1 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On)  <b>2 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On)	Metal Plastic	Non-Threaded Threaded	Right Angle PCB Pin  Solder Lug  Vertical PCB Pin  Wire Wrap	IP67
	<b>200</b>	<b>Electrical Life:</b> 6,000 Cycles <b>Mechanical Life:</b> 30,000 Cycles <b>Operating Temp:</b> -20°C to 85°C <b>Contact Resistance:</b> 20mΩ Max.	<b>Silver:</b> 3A, 120VAC [cURus] 3A, 28VDC 1A, 250VAC [cURus]  <b>Gold:</b> 0.4VA, 20V Max. (AC or DC)	<b>1 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On) Off-On  <b>2 Pole:</b> On-On On-(On) On-Off-On	Metal	Non-Threaded Threaded	Right Angle PCB Pin  Solder Lug  Vertical PCB Pin	<b>×</b>
	<b>200A</b>	<b>Electrical Life:</b> 6,000 Cycles <b>Mechanical Life:</b> 30,000 Cycles <b>Operating Temp:</b> -30°C to 85°C <b>Contact Resistance:</b> 20mΩ Max.	<b>Silver:</b> 3A, 120VAC [cURus] 3A, 28VDC 1A, 250VAC [cURus]  <b>Gold:</b> 0.4VA, 20V Max. (AC or DC)	<b>1 Pole:</b> On-On On-(On) On-Off-On (On)-Off-(On) On-Off-(On) Off-On  <b>2 Pole:</b> On-On On-(On) On-Off-(On)	Metal Plastic	Non-Threaded	Right Angle PCB Pin  Vertical PCB Pin	IP67
	<b>200B</b>	<b>Electrical Life:</b> 6,000 Cycles <b>Mechanical Life:</b> 50,000 Cycles <b>Operating Temp:</b> -30°C to 85°C <b>Contact Resistance:</b> 20mΩ Max.	<b>Gold:</b> 0.4VA, 20V Max. (AC or DC)	<b>1 Pole:</b> On-(On) On-Off-On (On)-Off-(On) On-Off-(On)	Metal Plastic	Non-Threaded	Surface Mount	IP67
	<b>200R</b>	<b>Electrical Life:</b> 6,000 Cycles <b>Mechanical Life:</b> 40,000 Cycles <b>Operating Temp:</b> -30°C to 85°C <b>Contact Resistance:</b> 50mΩ Max.	<b>Gold:</b> 0.4VA, 48V Max. (AC or DC)	<b>1 or 2 Pole:</b> On-None-On On-None-(On) On-Off-On (On)-Off-(On) On-Off-(On)	Metal	Non-Threaded	Surface Mount  Right Angle PCB Pin  Vertical Right Angle PCB Pin	<b>×</b>
	<b>200U</b>	<b>Electrical Life:</b> 40,000 Cycles <b>Mechanical Life:</b> 40,000 Cycles <b>Operating Temp:</b> -30°C to 85°C <b>Contact Resistance:</b> 100mΩ Max.	<b>Gold:</b> 0.4VA, 20V Max. (AC or DC)	<b>1 or 2 Pole:</b> Off-On On-On On-Off-On	Plastic	Non-Threaded	PCB Pin  Right Angle PCB Pin  Vertical Right Angle-PCB Pin	IP67



E-SWITCH®		General Ratings	Electrical Ratings	Poles / Functions	Actuator Options	Bushing Options	Terminal Options	Ingress Protection
	ST1	<b>Electrical Life:</b> 6,000 Cycles <b>Mechanical Life:</b> 100,000 Cycles <b>Operating Temp:</b> -20°C to 85°C <b>Contact Resistance:</b> 50mΩ Max.	<b>Maintained Switches:</b> 20A, 125VAC [cURus] 15A, 277VAC [cURus] 2HP, 125-277VAC [cURus] <b>Momentary Switches:</b> 20A, 125VAC [cURus] 15A, 277VAC [cURus] 1.5HP, 125-277VAC [cURus]	<b>2 Pole:</b> Off-On On-On Off-(On) On-Off-On On-Off-(On) (On)-Off-(On)	Metal	Threaded	Quick Connect Screw Solder Lug Wire Leads	
	ST2	<b>Electrical Life:</b> 6,000 Cycles <b>Mechanical Life:</b> 100,000 Cycles <b>Operating Temp:</b> -20°C to 85°C <b>Contact Resistance:</b> 50mΩ Max.	<b>Maintained Switches:</b> 20A, 125VAC [cURus] 15A, 277VAC [cURus] 2HP, 125-277VAC [cURus] <b>Momentary Switches:</b> 20A, 125VAC [cURus] 15A, 277VAC [cURus] 1.5HP, 125-277VAC [cURus]	<b>2 Pole:</b> Off-On On-On Off-(On) On-Off-On On-Off-(On) (On)-Off-(On)	Metal	Threaded	Quick Connect Screw Solder Lug Wire Leads	
	ST3	<b>Electrical Life:</b> 6,000 Cycles <b>Mechanical Life:</b> 100,000 Cycles <b>Operating Temp:</b> -20°C to 85°C <b>Contact Resistance:</b> 50mΩ Max.	<b>Maintained Switches:</b> 24A, 125VAC [cURus] 15A, 277VAC [cURus] 2HP, 125-277VAC [cURus]	<b>3 Pole:</b> Off-On On-On On-Off-On	Metal	Threaded	Quick Connect Screw Solder Lug Wire Leads	
	ST4	<b>Electrical Life:</b> 10,000 Cycles <b>Operating Temp:</b> -10°C to 55°C <b>Contact Resistance:</b> 50mΩ Max. initial	16(8)A 125/250VAC μT55 20(8)A 125/250VAC μT55 20A 6-30VDC μT55	P1 - Off - (On) P2 - Off - On P3 - On - On P4 - (Off) - On P5 - (On) - Off P6 - (On) - ON P7 - ON - (On) P8 - On - Off - On P9 - On - Off - (On) P10 - (On) - Off - (On)	Metal Bat Plastic Bat	Threaded	Quick Connect Solder Lug Screw Terminals Wire Leads	IP68
	ST5	<b>Electrical Life:</b> 10,000 Cycles <b>Operating Temp:</b> -10°C to 125°C <b>Contact Resistance:</b> 50mΩ Max. initial	16(8)A 125/250VAC μT125/55 20(8)A 125/250VAC μT125/55 20A 6-30VDC μT125/55	P1 - Off - (On) P2 - Off - On P3 - On - On P4 - (Off) - On P5 - (On) - Off P6 - (On) - On P7 - On - (On) P8 - On - Off - On P9 - On - Off - (On) P10 - (On) - Off - (On)	Metal Bat Plastic Bat	Threaded	Quick Connect Solder Lug Screw Terminals	IP40

Specifications subject to change without notice


# SLIDE SWITCHES

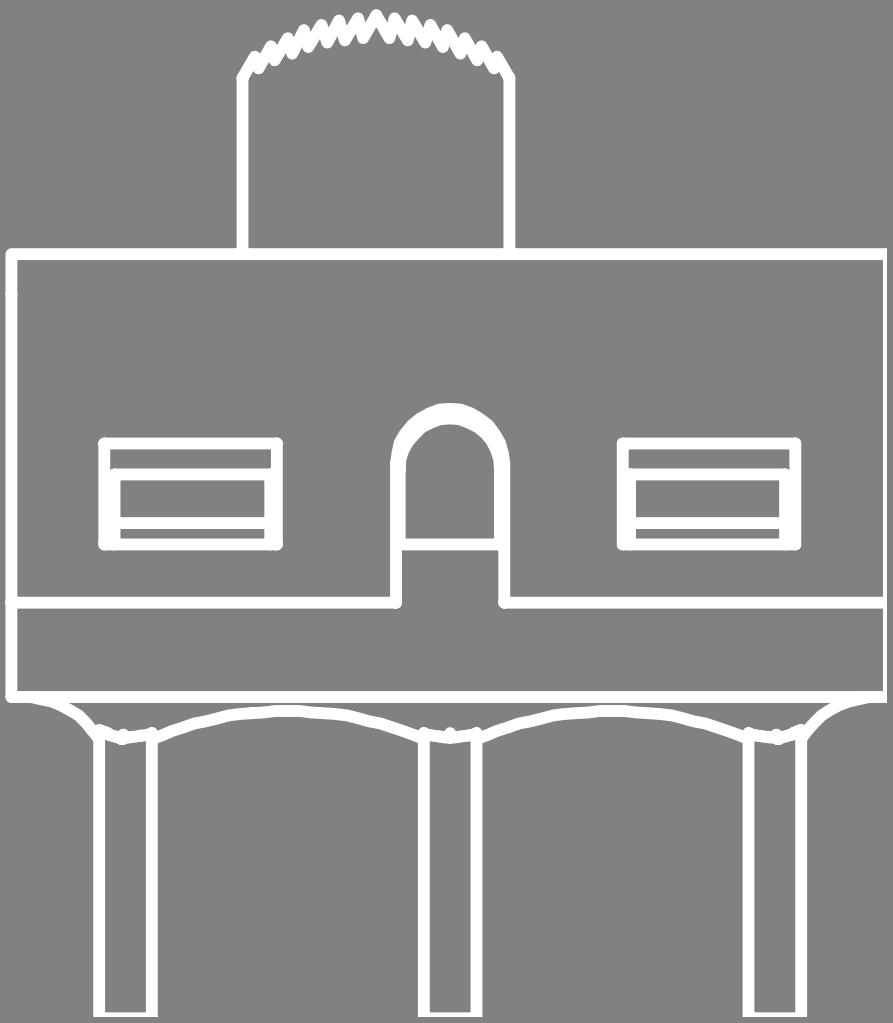


A slide switch utilizes a mechanical lever to turn an electrical current on and off. Depending on the number of positions available, the lever can move (slide) between an open or closed state. Compact in size, E-Switch offers Slide switches with multiple termination options. Slide switches are commonly used in computer server/peripheral equipment, instrumentation devices, test and measurement equipment and consumer electronics and household appliances.





 <b>E-SWITCH®</b>		Electrical Ratings	Poles	Positions	Terminal Options	Panel Mount Capable	Ingress Protection
	<b>500</b>	<b>Silver:</b> 5A, 120VAC [cURus] 2A, 250VAC [cURus] <b>Gold:</b> 0.4VA, 20V (AC or DC)	Up to 2 Poles	Up to 3 Positions	PCB Pin Solder Lug Quick Connect Wire Wrap	●	✗
	<b>500A</b>	<b>Silver:</b> 3A, 120VAC [cURus] 1A, 250VAC [cURus] <b>Gold:</b> 0.4VA, 20V (AC or DC)	Up to 2 Poles	Up to 3 Positions	PCB Pin	✗	✗
	<b>500R</b>	<b>Gold:</b> 0.4VA, 20V (AC or DC)	Up to 2 Poles	Up to 3 Positions	Right Angle PCB Pin Vertical PCB Pin	✗	IP67
	<b>600</b>	<b>Silver:</b> 1A, 30VDC <b>Gold:</b> 0.4VA, 20V (AC or DC)	1 Pole	Up to 3 Positions	Right Angle PCB Pin Vertical PCB Pin Surface Mount	✗	✗
	<b>EG</b>	200mA, 30VDC	Up to 6 Poles	Up to 6 Positions	PCB Pin Surface Mount	●	✗
	<b>EG1215</b>	25mA, 24VDC	1 Pole	2 Positions	Surface Mount	✗	✗
	<b>EG1312</b>	30mA @15VDC	3 Pole	3 Positions	Surface Mount PCB	✗	✗
	<b>EG1315</b>	25mA, 24VDC	1 Pole	3 Positions	Surface Mount	✗	✗
	<b>EGL2290</b>	300mA, 6VDC	2 Poles	2 Positions	Surface Mount	✗	✗

# DIP SWITCHES

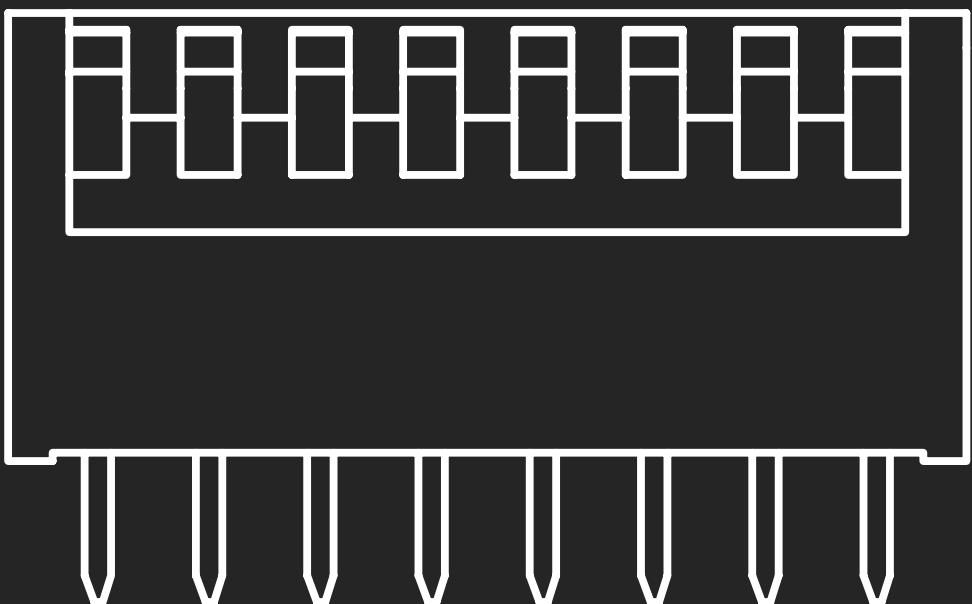


DIP switch refers to a set of electrical switches packaged in a small box or housing, which are arranged in a line or circle (rotary DIP). The function is to provide a range of electrical inputs to an electronic device based on the position of the individual switches within the line or circle. The main advantage of a DIP switch is the ability to quickly change positions. Common applications for DIP switches include computer server/peripheral equipment, instrumentation devices, test and measurement equipment, audio/visual equipment, consumer electronics and medical equipment.



# DIP Switches



 <b>E-SWITCH®</b>		General Ratings	Electrical Ratings	Dimensions (mm)	Positions	Actuator Options	Mounting Options	Packaging	Tape Seal / Washable
	<b>KAE</b>	<b>Life Cycles:</b> 2,000 <b>Operating Force:</b> 1,000gf Max. <b>Operating Temp:</b> -20°C to 85°C	<b>Switch:</b> 25mA, 24VDC <b>Carry:</b> 100mA, 50VDC	<b>Height:</b> 3.05 <b>Width:</b> 6.3 <b>Length:</b> Varies per # of positions	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12	Extended Recessed	SMT (Gull Wing) PCB Pin (Splayed or straight)	Tape and Reel Tube	
	<b>KAC</b>	<b>Life Cycles:</b> 2,000 <b>Operating Force:</b> 800gf Max. <b>Operating Temp:</b> -20°C to 85°C	<b>Switch:</b> 25mA, 24VDC <b>Carry:</b> 100mA, 50VDC	<b>Height:</b> 5.0 <b>Width:</b> 6.0 <b>Length:</b> Varies per # of positions	2, 4, 6, 8, 10	Extended	SMT (Gull Wing) PCB Pin (Splayed)	Tape and Reel Tube	
	<b>KAD</b>	<b>Life Cycles:</b> 2,000 <b>Operating Force:</b> 1,000gf Max. <b>Operating Temp:</b> -20°C to 85°C	<b>Switch:</b> 25mA, 24VDC <b>Carry:</b> 100mA, 50VDC	<b>Height:</b> 3.70 (Gullwing) 7.20 (Straight) <b>Width:</b> 9.80 (Gullwing) 7.62 (Straight) <b>Length:</b> Varies per # of positions	4, 5, 8, 9, 10	Extended Recessed w/ or w/out Top Tape Seal	SMT (Gullwing) PCB Pin (Straight)	Tape and Reel Tube	
	<b>KAN</b>	<b>Life Cycles:</b> 2,000 <b>Operating Force:</b> 500gf Max. <b>Operating Temp:</b> -40°C to 85°C	<b>Switch:</b> 25mA, 24VDC <b>Carry:</b> 100mA, 50VDC	<b>Height:</b> 1.5 <b>Width:</b> 4.5 <b>Length:</b> Varies per # of positions	2, 4, 6, 8, 10	Recessed	SMT (Gull Wing)	Tape and Reel Tube	
	<b>KAP</b>	<b>Life Cycles:</b> 2,000 <b>Operating Force:</b> 400gf Max. <b>Operating Temp:</b> -40°C to 85°C	<b>Switch:</b> 25mA, 24VDC <b>Carry:</b> 100mA, 50VDC	<b>Height:</b> 10.8 <b>Width:</b> 10.2 <b>Length:</b> Varies per # of positions	2, 3, 4, 5, 6, 7, 8, 9, 10, 12	Extended Recessed	PCB Pin	Tube	
	<b>KAS</b>	<b>Life Cycles:</b> 2,000 <b>Operating Force:</b> 1,000gf Max. <b>Operating Temp:</b> -40°C to 85°C	<b>Switch:</b> 25mA, 24VDC <b>Carry:</b> 100mA, 50VDC	<b>Height:</b> 6.0 <b>Width:</b> 9.9 <b>Length:</b> Varies per # of positions	2, 3, 4, 5, 6, 7, 8, 9, 10, 12	Extended Recessed	PCB Pin (Vertical & Right Angle)	Tube	
	<b>DR</b>	<b>2x3, 3x3, 4x1 Layout</b> <b>Life Cycles:</b> 15,000 Steps <b>Operating Force:</b> 500gf-cm Max. <b>Operating Temp:</b> -40°C to 85°C	<b>Switch:</b> 25mA, 24VDC <b>Carry:</b> 100mA, 50VDC	<b>Height:</b> 4.5 <b>Width:</b> 9.8 <b>Length:</b> 9.9	10, 16	Extended Flush	PCB Pin	Tape and Reel Tube	
	<b>RDM</b>	<b>3x3 Layout</b> <b>Life Cycles:</b> 25,000 Steps <b>Operating Force:</b> 120gf-cm Max. <b>Operating Temp:</b> -60°C to 125°C	<b>Switch:</b> 100mA, 42VDC <b>Carry:</b> 400mA, 42VDC	<b>Height:</b> 3.65 (Vert) <b>Height:</b> 5.80 (RA) <b>Width:</b> 7.4 <b>Length:</b> 7.4	10, 16	Extended Flush	PCB Pin (Vertical & Right Angle) SMT	Tape and Reel Tube	IP67

Specifications subject to change without notice

## NOTES

# RECOMMENDED SOLDERING GUIDELINES & IP RATING

Most contamination problems can be prevented by exercising care during the cleaning and soldering process. Care should be taken not to immerse or spray unsealed switches during flux removal. Contact E-Switch for specific soldering recommendations and specifications not found in this catalog. Generalized soldering procedures are outlined below.

## HAND SOLDERING AND TEMPERATURES

Recommend soldering irons of 30 watt maximum with a tip temperature of 345°C (650°F) for 2-3 seconds and solder of 0.030 - 0.040 diameter.


## SMT REFLOW (LEAD AND LEAD-FREE)

### "TYPICAL" SMT REFLOW (Pb and Pb-Free)

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average Ramp-Up Rate ( $T_{Smax}$ to $T_p$ )	3°C/second max.	3°C/second max.
<b>Preheat</b>		
-Temperature Min. ( $T_{Smin}$ )	100°C	150°C
-Temperature Max. ( $T_{Smax}$ )	150°C	200°C
-Time ( $t_{Smin}$ to $t_{Smax}$ )	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature ( $T_L$ )	183°C	217°C
-Time ( $t_L$ )	60-150 seconds	60-150 seconds
Time within 5°C of actual Peak Temperature ( $t_p$ )	10-30 seconds	20-40 seconds
Ramp-Down Rate	6°C/second max.	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

*Note 1: All temperatures refer to topside of the package, measured on the package body surface.*

## Classification Reflow Profile

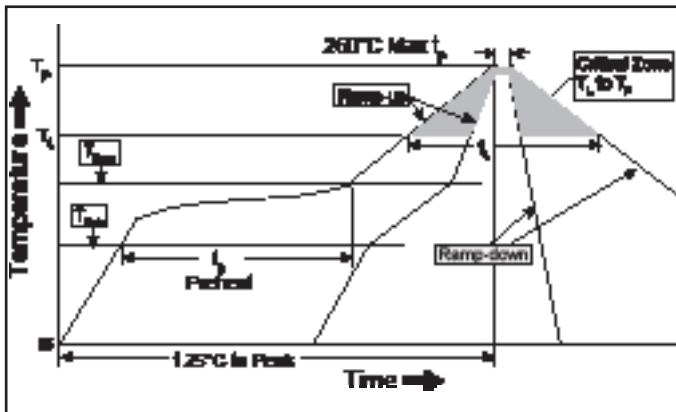


## WAVE SOLDER TIME AND TEMPERATURES

When wave soldering, we recommend using a no-clean flux soldering process, rather than a process that requires washing. The fluxing process must be controlled so as not to have flux migrate inside the switch.

## WAVE SOLDER

(Includes Pb-Free, max. component side preheat temp-130°C)

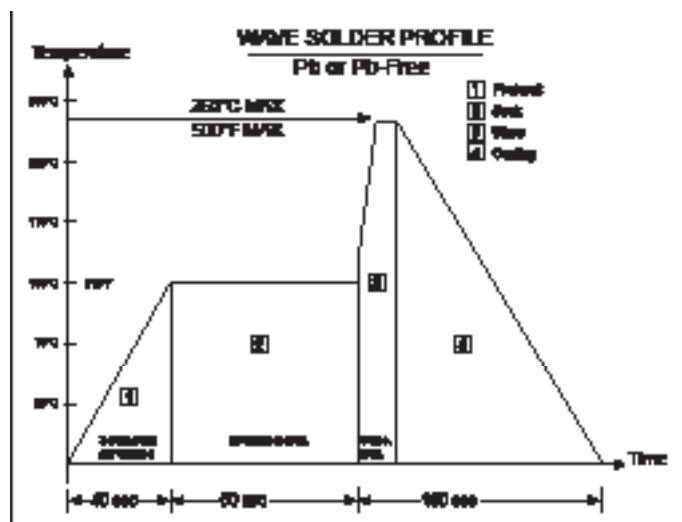

Good venting is required. No-clean flux vapors can enter the switch if adequate venting is not available. The vapors will condense on the internal contacts and become an insulator when they solidify.

- Preheat temperature/time: Circumferential temperature of the P.C. Board not to exceed 100°C (212°F) for 60 seconds.
- Soldering temperature/time: not to exceed 260°C (500°F) for 5 seconds.

IP Rating Chart			
First Number	Definition	Second Number	Definition
Protection against solid objects		Protection against liquids	
0	No protection	0	No protection
1	Protected against solid objects over 50mm (e.g. accidental touch by hands)	1	Protected against vertically falling drops of water
2	Protected against solid objects over 12mm (e.g. fingers)	2	Protected against direct sprays up to 15° from the vertical
3	Protected against solid objects over 2.5mm (e.g. tools and wires)	3	Protected against direct sprays up to 60° from vertical
4	Protected against solid objects over 1mm (e.g. tools, wires and small wires)	4	Protected against sprays from all directions - limited ingress permitted
5	Protected against dust - limited ingress (no harmful deposit)	5	Protected against low pressure jets if water from all directions - limited ingress permitted
6	Totally protected against dust	6	Protected against strong jets of water (e.g. for use on shipdecks - limited ingress permitted)
		7	Protected against the effects of temporary immersion between 15cm and 1m. Duration of test 30 min.
		8	Protected against long periods of immersion under pressure



# E-SWITCH®

## ABOUT US

E-Switch, headquartered in Minneapolis, Minnesota, has been delivering quality electromechanical switches to the telecom, high tech, medical, electronics, instrumentation, industrial, audio/visual, appliance and consumer markets since 1979. With international offices in Singapore and Hong Kong, E-Switch's global reach includes North America, Europe, Asia and Latin America.

### E-SWITCH, INC.

7153 Northland Drive N  
Minneapolis, MN 55428-1514  
USA

**Phone:** 763-504-3525  
**Toll Free:** (USA):800-867-2717  
**Fax:** 763-531-8235

### E-SWITCH ASIA

8 Burn Road  
#09-14, Trivex  
Singapore 369977

**Phone:** +65 6909 0863

[www.e-switch.com](http://www.e-switch.com)



E-Switch, Inc



E-Switch, Inc